Technical specification sheet



BCU 40 A 30 | Battery Cutter

Specifications		
article number		170.012.136
model		BCU 40 A 30
max. working pressure	psi	7252
blade type		30 standard
cutter type		mobile
short description		Battery Cutter
battery included		no
max. cutting force	lbf	144777
max. cutting opening	in	7.1
protection rate		IP54
sound emission @ 1m/3.25ft	dB(A)	74
sound emission @ 4m/13ft	dB(A)	65
required oil content (effective)	OZ	5.5
weight, ready for use	lb	52.0
temperature range	°F	-4 + 131


Technical drawing dimensions		
dimension A	in	35.8
dimension B	in	10.9
dimension C	in	8.6

Required Accessories	
Greenline Battery BPA285	150.006.208
Greenline Battery Charger BCH1	150.182.208
Greenline Battery Charger BCH2	150.182.209
Greenline Battery Charger BCH3	150.182.286
Greenline Battery BPA286	151.000.307

Accessories	
Mains Power Connector BMC1	150.182.206
Mains Power Connector BMC2	150.182.207
Carrying Strap	150.182.249
Ratched Head	150.581.672
Cap. Hex. Size 41	150.581.691
Battery Pouch	150.182.214
Torque Wrench	150.581.671
Lubricants Set	170.013.021





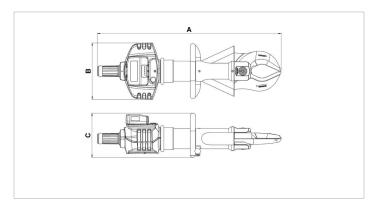

holmatro.com