Technical specification sheet



EHW 1650 Compact Electric Pump - EHW 1650


Specifications		
article number		100.551.001
model		EHW 1650
short description		Compact Electric Pump - EHW 1650
max. working pressure	bar/Mpa	720 / 72
first stage output / min.	CC	2000
second stage output / min.	СС	250
capacity oil tank (effective)	CC	1650
connection		3/8" NPT female
engine		230 VAC - 0.35 kW - 50 Hz - 1 Ph
charge remote control	V	15
weight, ready for use	kg	11.6
dimensions (AxBxC)	mm	416 x 190 x 222

Standard supplied with

• Waterproof (IP 54) Remote Control with 2.3 m long electric cord

Required Accessories		
Gauge Set - EHW 1650	100.182.158	
Needle Valve + Gauge Set - EHW 1650	100.182.162	



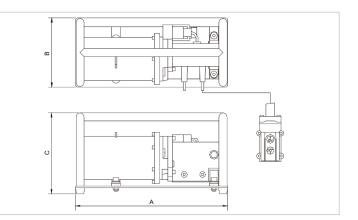

holmatro.com

© Holmatro 2024-04-15

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.