

# RESCUE TOOLS



 **holmatro**  
mastering power

## YOU CAN COUNT ON US, FOR LIFE

For over half a century, Holmatro has been developing the most innovative and powerful equipment for rescuers worldwide. This catalog includes an important selection of our product range. For more tools and more information, please visit [www.holmatro.com](http://www.holmatro.com).

## TABLE OF CONTENTS

### TECHNOLOGY & DESIGN

Pentheon Technology	4
CORE Technology	8
Core or cordless?	9
Inclined cutting	10
Holmatro NCT Cutters	12
OmniShore	14

### CUTTERS

Pentheon Cutters	16
Cordless Mini Cutter	18
CORE NCT Cutters - Inclined	19

### SPREADERS

Pentheon spreaders	20
CORE spreaders	21
Spreaders - Accessories	22

### COMBI TOOLS

Pentheon Combi tools	24
CORE Combi tools	26
Hand-operated Combi tools	28
Combi tools - Accessories	29

### RAMS

Pentheon Rams - telescopic	30
Pentheon Rams - single plunger	31
CORE Rams - telescopic	32
Rams - Accessories	33

### BREACHING

Door Openers	34
Forcible Entry Tool T1	36

### SHORING & STABILIZATION

OmniShore	38
OmniShore Sets	39
OmniShore Drive Elements	42
OmniShore Expansion Sets	43
OmniShore Struts	44
OmniShore Accessories	45
V-Strut	46
Carrying/Storage Bag V-Strut	46
Sheet Metal Knife	46
Chocks & Blocks	46

### LIFTING & WEDGING

Lifting Bags HLB	47
Stack Bags HSB	48
Accessories HLB & HSB	50

### VARIOUS RESCUE TOOLS

Concrete Crusher	51
------------------	----

### RESCUE ASSIST TOOLS

Ram supports	52
Tool station	52
Airbag protection cover	53
Sharp edge protection covers	53
Protection shield	53
Glass-Master	54
Window Punch	54
Extrication gloves	54

### POWER SOURCES

Pentheon batteries, chargers and cables	55
Backpack Pump	56
Spider Range pumps - SR 10	57
Spider Range pumps - SR 20	58
Spider Range pumps - SR 40	59
Handpump	60

### HOSES

Hoses	61
Hose reel	61

A history of innovation	62
-------------------------	----

# PENTHEON



**THE NEW SUPERIOR PENTHEON SERIES**  
**UNRESTRAINED PERFORMANCE FOR YOUR MISSION**

- CUTTERS -

- RAMS -


- COMBI TOOLS -

- SPREADERS -

# UNPARALLELED SPEED STEPLESS SPEED MAXIMIZATION

Pentheon tools are the fastest rescue tools on the market. A revolutionary mechatronic system inside the tools continuously optimizes the motor and pump settings, to deliver a maximized oil flow over the full pressure range. This provides you, as a rescuer, with unparalleled tool speed at any load.

Where all other rescue tools show a significant decrease in speed when switching to another stage to deal with higher loads, Holmatro Pentheon tools stick to the ideal stepless speed curve.

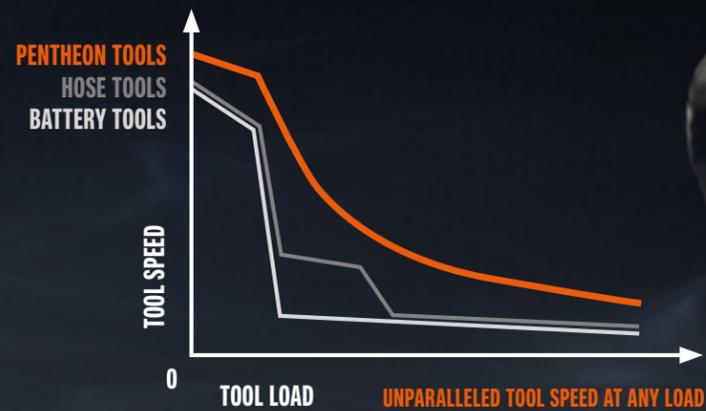

**PATENTED**

# BATTERY MANAGEMENT MADE EASY ON-TOOL CHARGING

Stop swapping batteries! From now on you can charge the battery while it's still on the tool. Simply connect the tool to the charger and the whole charging process will regulate itself. The battery on the tool always has priority over the one on the charger, which will resume charging when the battery on the tool is 100% full. You can connect up to 3 chargers to be powered from a single outlet. This allows you to charge 6 batteries without any management.



# ADVANCED CONNECTIVITY

Transform your phone or tablet into an extension of your tools with the sophisticated MyHolmatro app. Simply connect Pentheon via Bluetooth® and the app will provide insights such as battery state of health and state of charge, pump stage, motor temperature, working pressure (including peak pressure) and speed mode. Additionally, the app can quickly and easily perform an automated self-check, to ensure the best rescue performance possible.



# ULTIMATE CONTROL TWO-SPEED INLINE CONTROL HANDLE

The unparalleled speed of Pentheon is most useful when dosed. That's why the clever two-speed inline control handle lets you take full command. Easily switch between high- and low-speed at any time and experience stepless speed, proportional to how far you turn the handle.



DISCOVER ALL FEATURES  
AND BENEFITS ON  
[HOLMATRO.COM/  
PENTHEON](http://HOLMATRO.COM/PENTHEON)

# CORE TECHNOLOGY

No. 1 in traditional rescue systems



# CORE OR CORDLESS?




Same reliable performance, different benefits

## HOLMATRO CORE TECHNOLOGY HAS MADE RESCUE PROCEDURES QUICKER, EASIER AND SAFER



Back in 2005 Holmatro introduced a revolutionary new technology that would change the world of rescue and become the new international standard in hydraulic rescue sets. CORE stands for Coaxial Rescue Equipment and replaces the dual hose rescue tool set based on two (separate high- and low-pressure) hoses with four couplers and a valve on the pump for switching between tools. CORE tools only have one hose with one coupler on each end and eliminate the need to operate a valve on the pump, as they can be changed under flow. This saves precious set-up time and manpower. In addition, The CORE hose is a major step forward in safety. It consists of a high-pressure line inside (and protected by) the low pressure line. This design fully eliminates the risk of hydraulic injection.

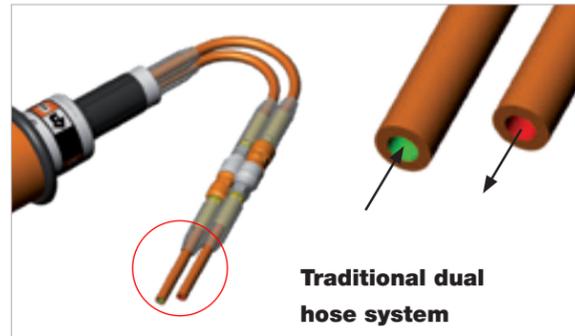

## THE CHOICE IS YOURS

Whether you would like to keep working with a tool-hose-pump system or switch to the latest battery-powered equipment, Holmatro offers you the best of both worlds. It really all depends on what you prefer. While CORE tools are lighter and more compact, the new cordless Pentheon tools have the highest speed ever. Both solutions have their own benefits, but offer you the same reliable performance. Check the comparison below and feel free to contact your local dealer for a product demonstration.

CORE TOOL-HOSE-PUMP SYSTEM	CORDLESS PENTHEON TOOLS
<ul style="list-style-type: none"> <li>Attached to a pump, mobility limited by hose length</li> <li>Set-up time</li> <li>More storage space</li> </ul>	<ul style="list-style-type: none"> <li>Self-contained, ultimate freedom of movement</li> <li>No set-up time, immediately ready for use</li> <li>Less storage space (no pump and hoses)</li> </ul>
<ul style="list-style-type: none"> <li>Emissions from the pump (petrol engine)</li> <li>More maintenance</li> </ul>	<ul style="list-style-type: none"> <li>Emission-free</li> <li>Less maintenance (no pump and hoses, no yearly oil and spark plug replacement)</li> </ul>
<ul style="list-style-type: none"> <li>Lower weight</li> <li>More compact dimensions</li> </ul>	<ul style="list-style-type: none"> <li>Higher weight</li> <li>Slightly bigger</li> </ul>
<ul style="list-style-type: none"> <li>Equipment diagnostics by authorized Holmatro Service Center</li> </ul>	<ul style="list-style-type: none"> <li>Holmatro Diagnostics Software available including options for end users</li> </ul>

# ***INCLINED*** CUTTING


## THE 30° REVOLUTION

With its unique 30-degree angled jaw, the Holmatro Inclined Cutter improves user comfort and maximizes working space. Available in various models, see pages 16.

### Improved ergonomics



### Maximized working space

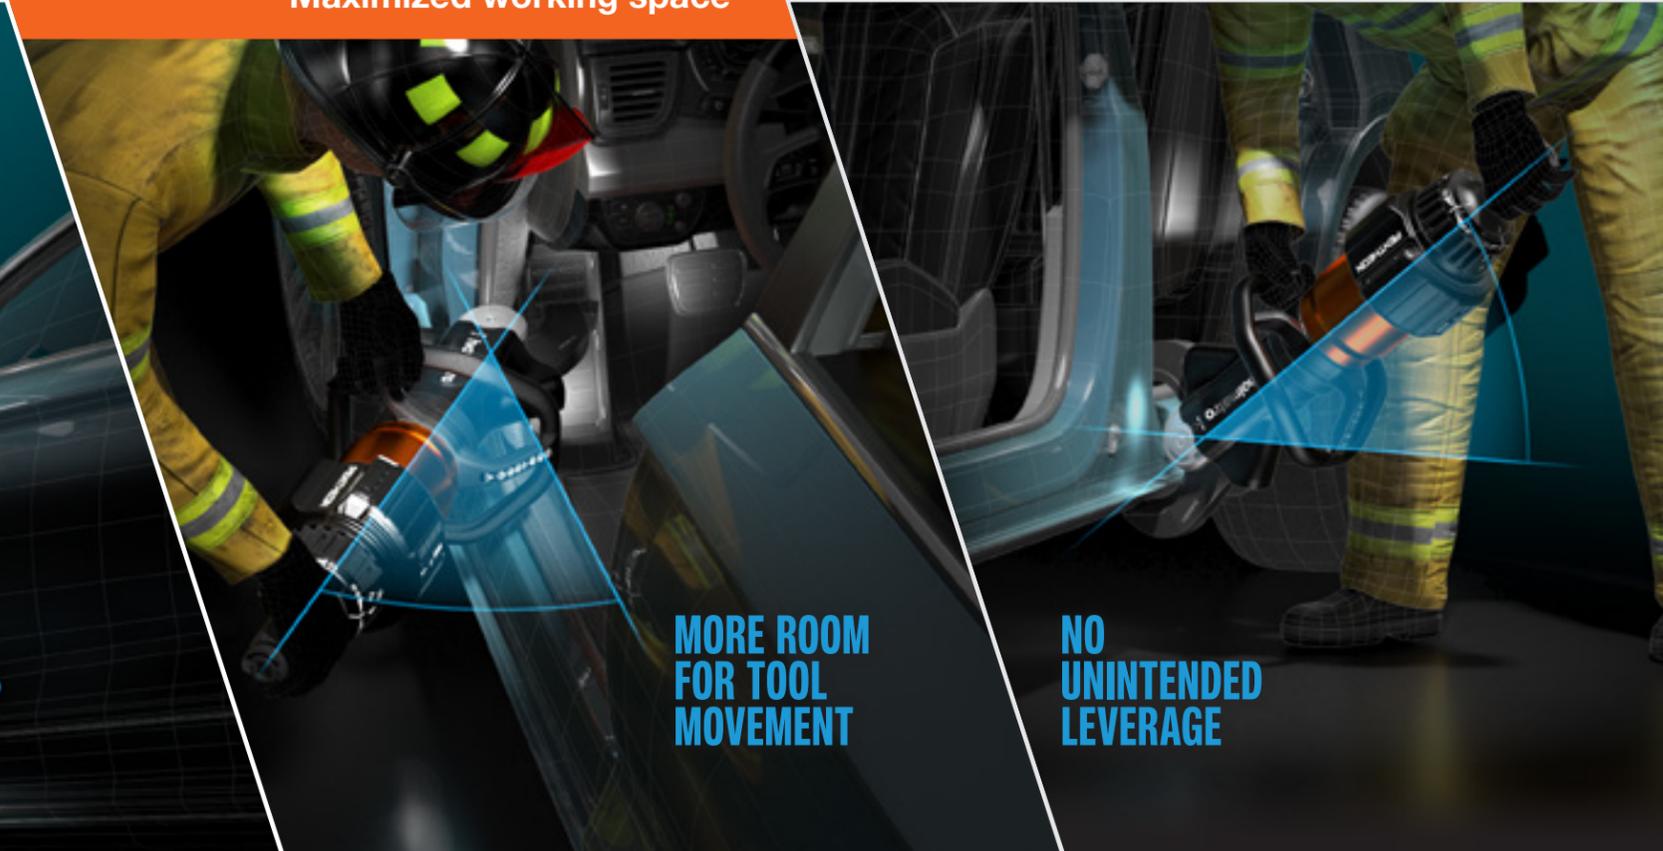


#### When cutting high

The body of a car often needs to be cut high up. This means you need to lift the cutter to shoulder level or above. Physically, this is extremely demanding. The Holmatro Inclined Cutter allows users to cut materials well above waist level without unnecessary strain.

#### When cutting low

The same principle also applies when cutting low on the door hinge or the rocker channel. It is physically demanding, as you need to bend down putting undue strain on your back. Again, the Holmatro Inclined Cutter proves its value: the angled jaw makes cutting in low positions more comfortable.

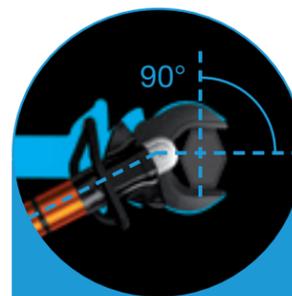

Inclined cutter blades keep the ideal 90° angle towards the construction, required for effective cutting. Any other position will reduce cutting performance.

#### More room for tool movement

The Holmatro Inclined Cutter offers 30 degrees more working space between the tool and the car. It leaves more room for tool movement, which enhances patient safety and eliminates the need for repeated cutter repositioning.

#### No unintended leverage

When you need to cut at a low level - through the car's rocker channel, for example - the Holmatro Inclined Cutter with its tilted jaw doesn't need to be positioned close and parallel to the ground. This avoids unwanted leverage and vehicle displacement caused by the tool, which could worsen the patient's medical condition.



# HOLMATRO NCT CUTTERS

## UNMATCHED PERFORMANCE

Holmatro's New Car Technology Cutters generate high forces and have excellent EN and NFPA performance scores. But in the end, the only thing that counts is their unmatched performance on actual vehicles during life-saving operations.

### Tested on the latest car models

At Holmatro we believe in true cutting performance which cannot be reflected by (theoretical) specifications on paper. That is why we keep testing our cutters on the latest and strongest vehicle models. Not only should they be able to perform well on today's toughest cars, they should also have a capacity reserve for the future, when even stronger cars will be driving on our roads. And the good news is: they do! Watch the video on [holmatro.com/en/test](http://holmatro.com/en/test).

### Ready for the future

With Holmatro cutters you are prepared for the future! During our tests we place an inline pressure gauge in the hose, so we can see how much capacity is left for when it gets even tougher.

**TEST:**  
**BMW X3, B-PILLAR**  
**SINGLE CUT**  
**CUTTER: CU 5060 I**  
**AV. PRESSURE:**  
**4,351 OUT OF 10,443 PSI**



## THANKS TO SMART TOOL DESIGN


### NCT blade design

Holmatro's U-shaped New Car Technology blades pull even the strongest new car materials into the cutting recess where they are cut at the highest possible force.



### i-Bolt

Holmatro's patented flat central bolt construction (without a blade holder in between!) presses the blades together directly and more tightly. This minimizes blade separation and maximizes cutting performance. An additional advantage of the i-Bolt is that it fits into confined spaces.

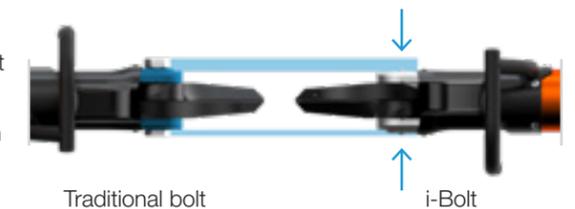

### Optimized cutting edge

Holmatro's enhanced cutting edge design withstands wear and damage even better. It ensures a longer life of the blades and superior cutting performance.



**WATCH THE VIDEO ON  
[HOLMATRO.COM/EN/TEST](http://HOLMATRO.COM/EN/TEST)**



# EXCEPTIONAL SHORING POWER. READY TO SECURE SAFETY.

Perform all shoring operations with one system, build constructions quickly and easily and take control of every scenario with less people. This is OmniShore.

## OMNISHORE CAN DO IT ALL



### Vehicle shoring

Flawlessly execute vehicle extrication operations, whether you need controlled vehicle stabilization or lifting.



### Trench shoring

Create multiple safe zones in shallow or deep trenches in a revolutionary way, so you can shore walls to prevent collapse and cave-ins.



### High directionals

Everything you need to build high directionals to take on even the most challenging rope rescue scenarios.



### Structural shoring

The most innovative, fast and safe way to support a structure with rakers, spot shores and more to prevent a collapse.

## OVERCOME UNLIMITED SHORING CHALLENGES WITH A MINIMUM NUMBER OF COMPONENTS

OmniShore is the world's first and only shoring solution that allows you to build any application with a system of only six different struts. Construct any length up to 17 feet or 5.2 meters with five different struts and without fixed length extension pipes, saving weight and space on your truck.



## EXPERIENCE A QUICK AND EASY SETUP IN ONE INTUITIVE WORKFLOW

Our patented Trident Coupler always fits with ease. You can only connect two struts max, so any connection you can make is 100% safe and offers you twice the plunger stroke. Moreover, every single accessory fits the Trident Coupler as well as the plunger end of each strut.



**PATENTED**

**DISCOVER ALL FEATURES AND BENEFITS ON  
HOLMATRO.COM/  
OMNISHORE**

# PENTHEON CUTTERS



PCU50

specifications	PCU30CL	PCU40	PCU50	PCU60
art. no. (excl. battery)	151.002.423	151.002.425	159.000.224	159.000.231
NFPA 1960, cutting capacity	A6 B5 C6 D6 E6 F2	A7 B7 C6 D7 E8 F3	A8 B8 C7 D9 E9 F4	A9 B9 C9 D9 E9 F4
cutter jaw	inclined	inclined	inclined	inclined
theoretical cutting force	lbf. 123,420	171,754	312,260	396,788
blade opening	in. 6.7	6.7	7.2	8.1
weight, ready for use (incl. battery)	lb. 33.7	41.4	47.6	55.3
round bar	in. 1.2	1.4	1.6	1.9
integrated lighting / i-Bolt / connectivity	√ / √ / √	√ / √ / √	√ / √ / √	√ / √ / √

Pentheon - Batteries, chargers and cables (see page 55)

### Inclined Cutter

- More ergonomics when cutting high or low on the car and more space between the tool and the car/your patient when cutting pillars from the side.




### Battery management made easy

- Stop swapping batteries! Holmatro introduces on-tool charging. The battery on the tool always has priority over the one on the charger. Charge up to 3 batteries simultaneously and up to 6 batteries without any management.



### Unparalleled speed & ultimate control

- Fastest rescue tools on the market, thanks to stepless speed maximization. With two-mode control handle for superior speed control.

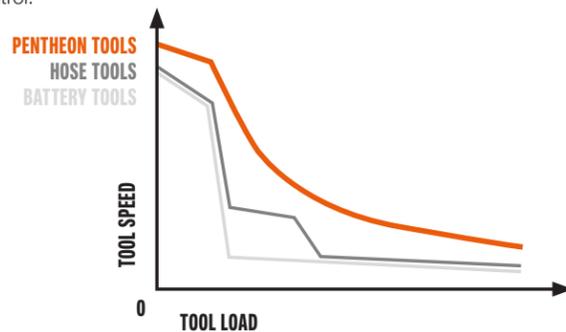

Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)



# CORDLESS MINI CUTTER



CCU10

specifications	CCU10
art. no. (incl. 2 x 2Ah battery)	151.001.500
cutter jaw	inclined
NFPA 1960, cutting capacity	A4 B3 C2 D4 E4
theoretical cutting force	lbf. 49,458
blade opening	in. 2.3
weight, ready for use (incl. battery)	lb 10.8
round bar	in. 0.9
integrated lighting / i-Bolt	√ / √

required accessory	art. no.
Battery charger CBCH2 (AC-US)	159.000.212



### Cordless design

- Immediately ready for use
- Maximum operational freedom
- Requires minimal space in the rescue vehicle



### Smart battery technology

- Up to 70 cuts with one 2Ah battery
- LED light powered by the main battery
- Part of the Cordless Alliance System (CAS): Battery compatible with other professional power tools

### Superior cutting performance

- Unique inclined cutter jaw for more freedom in positioning the tool
- Grip teeth on both blades for extra bite when cutting
- Suitable for cutting car pedals, steering wheels and head rests. Also for cutting rebar (USAR), fences, steel bars and chains (grade 43)



### Optimum tool control

- Variable speed control: push the button further down to increase the tool's speed
- Start-stop mode to save valuable battery time
- Control slide to switch between opening and closing the tool



# CORE NCT CUTTERS - INCLINED

NCT = New Car Technology




CU 5040 i

specifications	CU 5040 i	CU 5050 i	CU 5060 i
art. no.	150.012.290	150.012.306	150.012.289
NFPA 1960, cutting capacity	A7 B7 C6 D7 E8 F3	A8 B8 C7 D9 E9 F4	A9 B9 C9 D9 E9 F4
cutter jaw	inclined	inclined	inclined
blade opening	in. 6.7	7.2	8.1
theoretical cutting force	lbf. 171,754	312,260	396,788
weight, ready for use (hose connected)	lb. 31.7	37.7	46.3
weight (without hose)	lb. 29.1	35.1	43.7
round bar	in. 1.4	1.6	1.9
integrated lighting / i-Bolt	√ / √	√ / √	√ / √

### Inclined cutter jaw

- Significantly reduces physical strain when cutting the vehicle at high or low levels. Also offers extra working space to improve patient safety and prevent repeated tool repositioning.

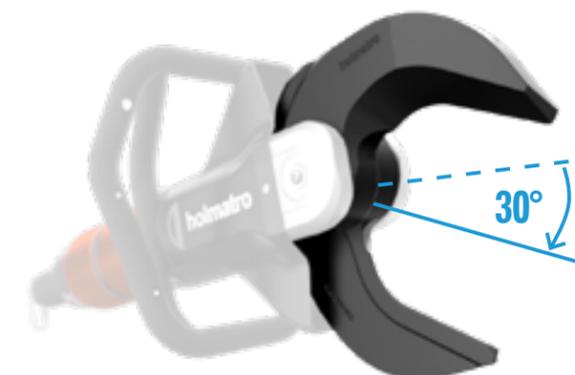

### Integrated LED lighting

- New LED lighting in the carrying handle: no less than six lights with a higher light output. You can start right away, both during the day and at night, without working in your own shadow.



### Ergonomic carrying handle

- Provides greater comfort in various working positions. The Inclined Cutter has one that goes all around the tool, so you can make use of the 30-degree advantage on either side of the vehicle.



# PENTHEON SPREADERS




PSP40

specifications	PSP40CL	PSP40	PSP50	PSP60
art. no. (excl. battery)	151.002.431	159.000.226	159.000.237	159.000.230
NFPA 1960 compliant	√	√	√	√
spreading distance	in. 20.1	28.5	28.5	32.3
max. spreading force	lbf. 29,450	62,947	82,280	117,350
min. spreading force (EN 13204)	lbf. 9,667	9,667	12,140	13,938
max. pulling force	lbf. 10,791	11,623	15,062	17,760
max squeezing force	lbf. 10,566	13,264	30,349	28,551
weight, ready for use (incl. battery)	lb. 33.7	43	46.3	54.9
integrated lighting / connectivity	√ / √	√ / √	√ / √	√ / √

Pentheon - Batteries, chargers and cables (see page 55)

### Extreme grip spreader tips

- New design with pointed teeth at both sides that bite into the material. For a superior grip while spreading and crushing.

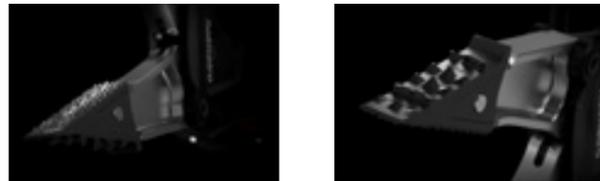

### Battery management made easy


- Stop swapping batteries! Holmatro introduces on-tool charging. The battery on the tool always has priority over the one on the charger. Charge up to 3 batteries simultaneously and up to 6 batteries without any management.



Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)

### Unparalleled speed & ultimate control

- Fastest rescue tools on the market, thanks to stepless speed maximization. With two-mode control handle for superior speed control.

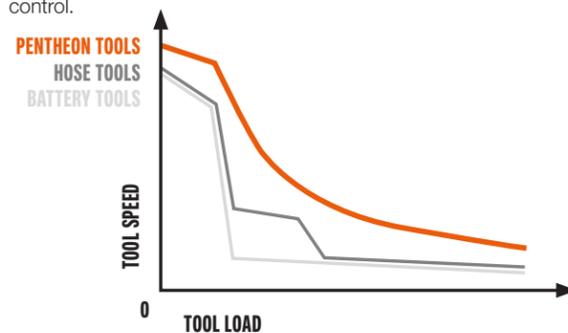

# CORE SPREADERS



SP 5240

specifications	SP 5240	SP 5250	SP 5260
art. no.	150.012.323	150.012.324	150.012.325
NFPA 1960 compliant	√	√	√
spreading distance	in. 28.5	28.5	32.4
max. spreading force	lbf. 62,947	82,280	117,350
min. spreading force (EN 13204)	lbf. 9,217	11,465	13,938
max. pulling force	lbf. 10,566	15,062	18,434
max. squeezing force	lbf. 13,264	30,349	28,551
weight, ready for use (hose connected)	lb. 34.8	37.9	46.1
weight (without hose)	lb. 32	35.1	43.2
integrated lighting	√	√	√

### Lighter than ever, no concessions

- Optimal performance to weight ratio.


### Ergonomic carrying handle

- New design increases operator comfort in various working positions.




### New LED lighting in the carrying handle

- No less than six LED lights with a higher light output.  
- You can start your job right away, both during the day and at night, without working in your own shadow.

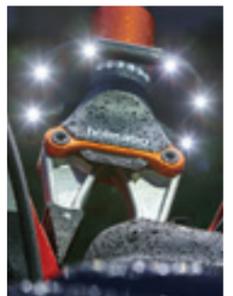

# SPREADERS - ACCESSORIES

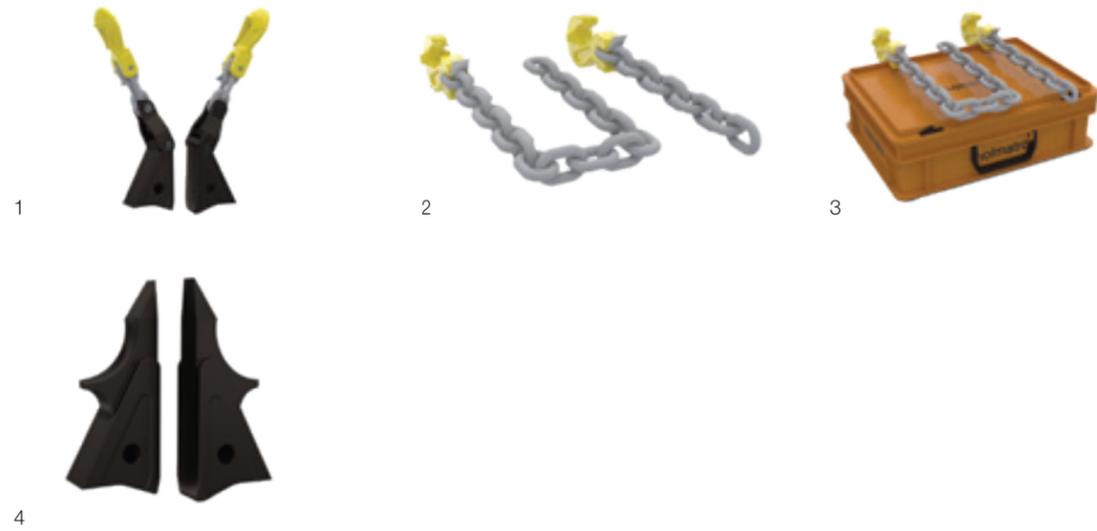

accessories	for Pentheon model	for CORE model	art. no.	
1	Pulling attachment set PAS 01	PSP40CL	--	150.182.273
	Pulling attachment set PAS 02	PSP40 PSP50	SP 5240 SP 5250	150.182.274
	Pulling attachment set PAS 03	PSP60	SP 5260	150.182.275
2	Pulling chain set PCS 01	PSP40CL PSP40 PSP50	SP 5240 SP 5250	150.582.152
	Pulling chain set PCS 03	PSP60	SP 5260	150.582.261
3	Pulling chain set in case PCS 02	PSP40CL PSP40 PSP50	SP 5240 SP 5250	150.582.021
	Pulling chain set in case PCS 04	PSP60	SP 5260	150.582.020
4	Cutting tip set CTS 01	PSP40 PSP50	SP 5240 SP 5250	150.006.474
	Cutting tip set CTS 02	PSP60	SP 5260	150.006.466



# PENTHEON COMBI TOOLS



PCT11

specifications	PCT11	PCT14
art. no. (excl. battery)	159.000.228	159.000.229
NFPA 1960, cutting capacity	A5 B5 C5 D6 E4 F3	A5 B5 C5 D6 E4 F3
spreading distance	in. 11.1	14.3
max. spreading force	lbf. 303,492	303,492
min. spreading force (EN 13204)	lbf. 10,791	7,419
max. cutting opening	in. 7.7	10.9
theoretical cutting force	lbf. 60,249	60,249
max. squeezing force	lbf. 9,892	7,644
weight, ready for use (incl battery)	lb. 30.4	31.3
round bar	in. 0.9	0.9
integrated lighting / i-Bolt / connectivity	√ / √ / √	√ / √ / √

Pentheon - Batteries, chargers and cables (see page 55)

### Compact, lightweight and well-balanced

- Easy to carry, handle, transport and store
- Ideal for use in confined spaces



### Unparalleled speed & ultimate control

- Fastest rescue tools on the market, thanks to stepless speed maximization. With two-mode control handle for superior speed control.



Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)

# PENTHEON COMBI TOOLS



PCT50

specifications	PCT50	PCT60
art. no. (excl. battery)	159.000.225	159.000.236
NFPA 1960, cutting capacity	A7 B8 C8 D8 E8 F3	A8 B9 C8 D9 E9 F4
spreading distance	in. 15	18.4
max. spreading force	lbf. 418,145	418,145
min. spreading force (EN 13204)	lbf. 9,667	10,004
max. cutting opening	in. 12.6	15.5
theoretical cutting force	lbf. 150,622	208,848
max. squeezing force	lbf. 19,558	19,761
max. pulling force	lbf. 23,380	23,605
weight, ready for use (incl battery)	lb. 45.2	51.8
round bar	in. 1.4	1.6
integrated lighting / i-Bolt / connectivity	√ / √ / √	√ / √ / √

Pentheon - Batteries, chargers and cables (see page 55)

### Battery management made easy

- Stop swapping batteries! Holmatro introduces on-tool charging. The battery on the tool always has priority over the one on the charger. Charge up to 3 batteries simultaneously and up to 6 batteries without any management.




### Removable tips (models PCT50 and 60)

- The tips can be easily removed by hand. To cut material without crushing it.



### Grip tooth / teeth at the inside of each combi tool blade (models PCT50 and 60)

- These prevent the material from being pushed out during cutting.

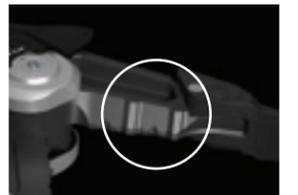

Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)

# CORE COMBI TOOLS



CT 5114 ST

specifications	CT 5114 ST	
art. no.	151.000.518	
NFPA 1960, cutting capacity	A5 B5 C5 D6 E4 F3	
spreading distance	in.	14.25
max. spreading force	lbf.	303,492
min. spreading force EN 13204	lbf.	7,419
max. cutting opening	in.	10.9
theoretical cutting force	lbf.	60,249
max. squeezing force	lbf.	7,644
round bar	in.	0.9
weight, ready for use (hose connected)	lb.	21.2
weight (without hose)	lb.	18.5
integrated lighting / i-Bolt/ rotating handle	-- / ✓ / ✓	

**Lightweight**

- Easy to carry and handle, reducing physical burden.

**Multifunctional**

- Cutting, spreading, squeezing with one tool.

**360° rotatable, flat foldable carrying handle**

- 11 locking positions for use at any angle.



# CORE COMBI TOOLS



CT 5160

specifications	CT 5150		CT 5160	
art. no.	151.001.058		150.012.330	
NFPA 1960, cutting capacity	A7 B8 C8 D8 E8 F3		A8 B9 C8 D9 E9 F4	
spreading distance	in.	15	18.4	
max. spreading force	lbf.	418,145	418,145	
min. spreading force EN 13204	lbf.	9,667	10,004	
max. cutting opening	in.	12.6	15.5	
theoretical cutting force	lbf.	150,622	208,848	
max. squeezing force	lbf.	19,558	19,761	
max. pulling force	lbf.	23,380	23,605	
round bar	in.	1.4	1.6	
weight, ready for use (hose connected)	lb.	35.5	41.7	
weight (without hose)	lb.	32.8	39	
integrated lighting / i-Bolt	✓ / ✓		✓ / ✓	

**Large spreading distance and cutting opening - CT 5160**


- Gives you great operational flexibility. Cuts wider materials and creates all the space you need.

**Removable spreading tips**

- To finish a cut without crushing material between the tips. Designed in one piece to prevent losing parts. Quick single-handed removal. With reflective markings for optimal visibility.

**Unique grip tooth**

- For extra bite when cutting. To prevent wider materials from being pushed out of the blades.

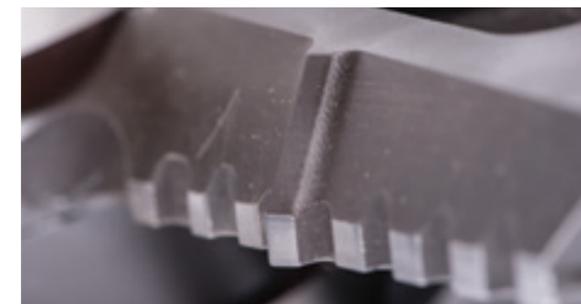

# HAND-OPERATED COMBI TOOLS



HCT 5114 ST

specifications	HCT 5114 ST	
art. no.	151.000.580	
NFPA 1960, cutting capacity	A5 B5 C5 D6 E4 F3	
spreading	in.	14.3
max. spreading force	lbf.	303,492
min. spreading force (EN 13204)	lbf.	7,419
max. cutting opening	in.	10.9
theoretical cutting force	lbf.	60,249
max. squeezing force	lbf.	7,644
weight, ready for use	lb.	20.1
round bar	in.	0.9
integrated lighting / i-Bolt / rotating handle	-- / √ / √	

**Self-contained with integrated 2-stage pump**

- For optimal freedom of movement.
- Rapid deployment: simply fold out the pump handle and start pumping.

**Pump handle foldable and rotatable**

- Easy carrying and storage.
- Can be used in any position.
- Also easy to use in confined spaces.

**360° rotatable, flat foldable carrying handle**

- 11 locking positions for use at almost any angle



# COMBI TOOLS - ACCESSORIES



accessories	for Pentheon model	for CORE model	for hand- operated model	art. no.
1 Pulling attachment set PAS 07	PCT50 PCT60	CT 5150 CT 5160		150.182.078
2 Pulling chain set PCS 03	PCT50 PCT60	CT 5150 CT 5160		150.582.261
4 Pulling chain set in case PCS 04	PCT50 PCT60	CT 5150 CT 5160		150.582.020
5 Carrying / backpack harness			HCT 5114 ST	150.553.115

# PENTHEON RAMS - TELESCOPIC



PTR50

specifications	PTR40	PTR50
art. no. (excl. battery)	159.000.238	159.000.227
NFPA 1960 compliant	√	√
spreading force 1st plunger	lbf. 30,574	30,574
spreading force 2nd plunger	lbf. 14,613	14,613
spreading stroke 1st plunger	in. 8.5	15.9
spreading stroke 2nd plunger	in. 7.6	15
(total) spreading stroke	in. 16	31
retracted / extended length	in. 15.2 / 31.2	22.8 / 53.7
weight, ready for use (incl battery)	lb. 34.4	45.4
integrated lighting / laser pointer / connectivity	√ / √ / √	√ / √ / √

Pentheon - Batteries, chargers and cables (see page 55)

## Smart ram extension

-When you connect the optional extension pipe the ram will automatically adapt its force to the new maximum length. Now you have one ram for all applications, including cross ramming from one side of the car to the other.




## Integrated laser pointer

-Integrated in the ram head, the laser pointer marks the exact spot where the ram will touch the car construction. It helps you position the tool first time right, which saves time and is safer for the patient. If you would need to retract the ram to reposition it, the car construction could spring back and re-entrap your patient. The laser pointer can help you avoid this risk.



## Unparalleled speed & ultimate control

-Fastest rescue tools on the market, thanks to stepless speed maximization. With two-mode control handle for superior speed control.

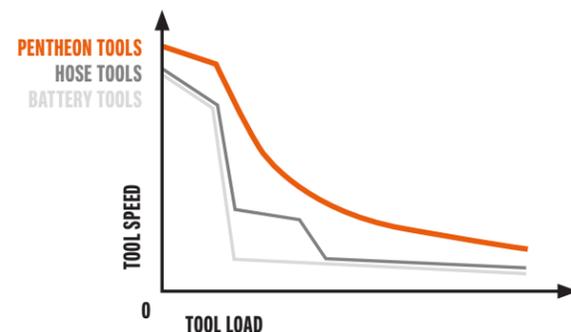

Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)

# PENTHEON RAMS - SINGLE PLUNGER

RAMS



PRA40

specifications	PRA40	PRA50
art. no. (excl. battery)	159.000.239	159.000.240
NFPA 1960 compliant	√	√
spreading force	lbf. 30,574	30,574
spreading stroke	in. 8.5	16
retracted / extended length	in. 15.2 / 23.6	22.8 / 38.8
weight, ready for use (incl. battery)	lb. 31.3	40.3
integrated lighting / laser pointer / connectivity	√ / √ / √	√ / √ / √

Pentheon - Batteries, chargers and cables (see page 55)

## Smart ram extension

-When you connect the optional extension pipe the ram will automatically adapt its force to the new maximum length. Now you have one ram for all applications, including cross ramming from one side of the car to the other.



## Double carrying handle

-For easy tool placement on both sides of the car and easier holding of the ram inside the car, where space is limited.  
-Made of a high-grade synthetic polymer: an extremely tough and elastic material that always returns into its original shape. Damage-proof!



## Battery management made easy

-Stop swapping batteries! Holmatro introduces on-tool charging. The battery on the tool always has priority over the one on the charger. Charge up to 3 batteries simultaneously and up to 6 batteries without any management.



Discover all features and benefits of the Holmatro Pentheon Series on [holmatro.com/pentheon](http://holmatro.com/pentheon)

## CORE RAMS - TELESCOPIC



TR 5350 LP

specifications	TR 5340 LP	TR 5350 LP	TR 5370 LP
art. no.	150.032.102	150.032.101	150.032.100
NFPA 1960 compliant	√	√	√
spreading force 1st plunger	lbf. 48,784	48,784	51,931
spreading force 2nd plunger	lbf. 22,706	22,706	24,954
spreading stroke 1st plunger	in. 5.9	14.8	17.7
spreading stroke 2nd plunger	in. 4.9	13.8	16.7
(total) spreading stroke	in. 10.8	28.5	34.5
plunger type	telescopic	telescopic	telescopic
retracted/extended length	in. 13.2 / 24	22 / 50.6	25 / 59.5
weight, ready for use (hose connected)	lb. 22.9	34.8	39.9
weight (without hose)	lb. 20.3	32.2	37.3
speed valve / integrated lighting / laser pointer	√ / √ / √	√ / √ / √	√ / √ / √

### Integrated laser pointer

- To help you hit the right spot in one go, which saves time and is safer for the patient.



## RAMS - ACCESSORIES



accessories	for model	art. no.
1 Extension pipe TRE 01 9.8 in.	TR 5340 LP	150.182.337
2 Extension pipe TRE 02 17.7 in.	TR 5340 LP	150.182.336
3 Extension pipe TRE04 8.7 in.	PTR40 PTR50 PRA40 PRA50	151.001.771
4 Extension pipe TRE05 17.3 in.	PTR40 PTR50 PRA40 PRA50	151.001.902

Ram support HRS 22 (NCT) (see page 52)  
Cross ram support set XRS01 (see page 52)



# DOOR OPENERS



Door Ram PDR200

specifications	PDR200	
art. no. (excl. battery)		151.004.496
spreading force over full stroke	lbf.	15,961
retracted length	in.	31.6
extended length	in.	43.4
stroke	in.	11.8
weight, ready for use (incl. battery)	lb.	31.3
integrated lighting / connectivity		√ / √



Pentheon - Batteries, chargers and cables (see page 55)

### Highly capable

- Thanks to a long spreading stroke even the most flexible doors can be opened
- Unlike combi tool style door openers the door ram has a constant high spreading force over its full stroke, to provide full power where you need it

### Unparalleled speed for faster operations

- Fastest door ram on the market thanks to Stepless Speed Maximization (patented)
- The tool continuously optimizes its motor and pump settings, giving you maximum speed at any tool load

### Ease of placement

- With its small toe height the door ram can be easily inserted into the door frame



### Enhanced safety for the operator

- The toe is attached at a 90-degree angle to the tool body, so you need not be in front of the door to operate the tool. You can work from a position next to the door, out of harm's way



### Battery management made easy

- Charge batteries directly on the tools with the On-Tool Charging System



# DOOR OPENERS



DR200

door ram	DR200	
art. no.		151.004.720
spreading force over full stroke	lbf.	15,961
retracted length	in.	23.5
extended length	in.	35.3
stroke	in.	11.8
weight, ready for use (hose connected)	lb.	18.7
weight (without hose)	lb.	16.8



### Compact and lightweight

- Easy to carry and handle

### Highly capable

- Thanks to a long spreading stroke even the most flexible doors can be opened
- Unlike combi tool style door openers the door ram has a constant high spreading force over its full stroke, to provide full power where you need it

### Ease of placement

- With its small toe height the door ram can be easily inserted into the door frame



### Enhanced safety for the operator

- The toe is attached at a 90-degree angle to the tool body, so you need not be in front of the door to operate the tool. You can work from a position next to the door, out of harm's way

### One person operation when used with our backpack pump

- No need to carry and operate a separate hand pump

# FORCIBLE ENTRY TOOL T1



T1

specifications		T1
art. no.		151.001.787
spreading distance	in.	5
max. spreading force	lbf	7,419
min. spreading force 25 mm tip	lbf	5,845
max. cutting opening	in	1.1
theoretical cutting force	lbf	31,248
round bar (S235)	in	0.7
weight, ready for use	lb	17

## Multifunctional tool

- The T1 can hammer, cut, spread, lift, wedge and ram. This means you always have the right tool for the job.
- The wedge is detachable, meaning no second person or tool is needed for creating the first gap.
- Having all these functions in one tool also saves weight and space in your vehicle.
- The T1 is a stand-alone tool, so you won't need batteries or an external pump.



## Optimized cutting blades and jaw design

- The T1 can easily cut rebar, chain and padlock.
- It can cut up to  $\varnothing$  0.7 in of round bar (S235).
- You can easily replace the cutting blades when they are damaged.



## Spreading tips

- For opening heavy doors in a controlled way
- The load-holding function makes the tool suitable for lifting and progressive lifting
- You can also use the spreading tips to create space in vehicles.



# OMNISHORE



### Designed to save weight and space on your truck

- One single system for all shoring operations
- Build any application with a system of only six different struts
- Construct lengths up to 17 ft with only five different struts
- No fixed length extensions needed – Each strut also functions as an extension pipe


### Quick and easy setup

- Every strut can be connected to every other strut thanks to the patented Trident Coupler
- Each accessory fits on both ends of all the struts
- No accurate measurement needed – Two connected struts offer you twice the plunger stroke

### Maximum safety

- All strut combinations are allowed and safe – The patented Trident Coupler only allows you to connect two struts max
- Strongest struts in the market – Rigorously tested in multiple setups
- Holmatro developed OmniShore according to the criteria of testing used by FEMA's US&R Structures Sub Group to evaluate similar type shoring

# TRENCH SHORING SETS

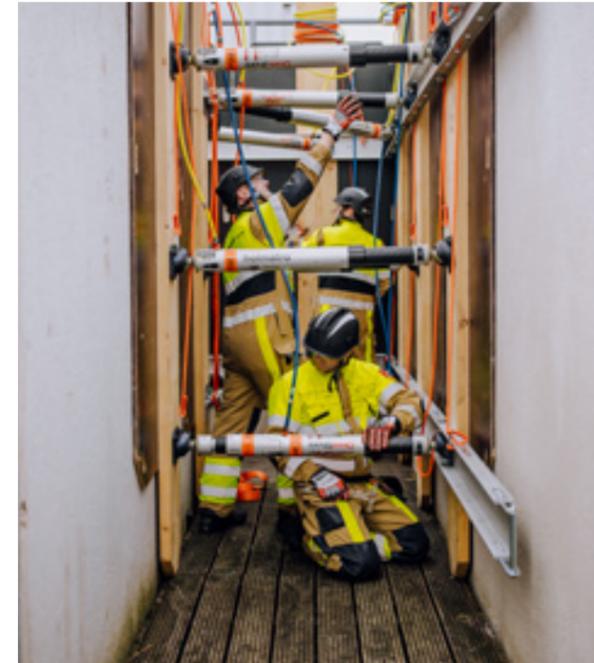

### Basic Trench Shoring – Pneumatic Set

- For small & medium trenches and basic spot shores
- With expansion sets also suitable for T-trench, vehicle stabilization, lifting and high directionals

Basic Trench Shoring Pneumatic Set T-PS1		PNEUMATIC
description	quantity	
Strut P40	4x	
Strut P30	4x	
Strut P20	2x	
Strut M10	4x	
Shoring Hammer RS15	2x	
Swivel Base BPL10	18x	

### Advanced Trench Shoring – Pneumatic Set

- For large trenches and basic spot shores
- With expansion sets also suitable for T-trench, L-trench, vehicle stabilization, lifting and high directionals

Advanced Trench Shoring Pneumatic Set AT-PS1		PNEUMATIC
description	quantity	
Strut P60	2x	
Strut P40	8x	
Strut P30	8x	
Strut P20	4x	
Strut M10	6x	
Shoring Hammer RS15	4x	
Swivel Base BPL10	36x	




Scan this code to configure now!



## CONFIGURE YOUR ALL-NEW RESCUE SHORING SYSTEM

The OmniShore Configurator is a user-friendly online tool guiding you through the process of selecting the sets that suit your needs. Discover what applications can be built with your personal configuration and start your OmniShore journey.

# VEHICLE & STRUCTURAL SHORING SETS

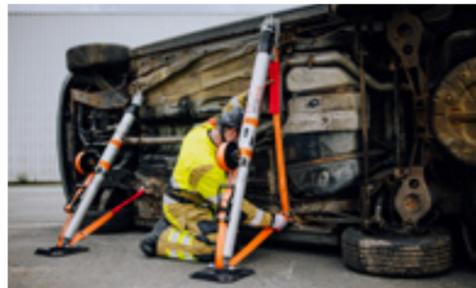


## Basic Vehicle & Structural Shoring Pneumatic Set VS-PS1 PNEUMATIC

description	quantity	
Strut P40	2x	
Strut P30	2x	
Strut M10	2x	
Swivel Base D-ring BPL11A	2x	
Multi Head HPL140	2x	
Swivel Base BPL10	2x	
Chain Adapter HPL110	2x	
Chain CWH60	1x	
Shoring Hammer RS15	2x	
Ratchet Belt RBL80	3x	

### Basic Vehicle & Structural Shoring Pneumatic Set

- For vehicle stabilization and basic spot shores
- With expansion sets also suitable for lifting and high directionals

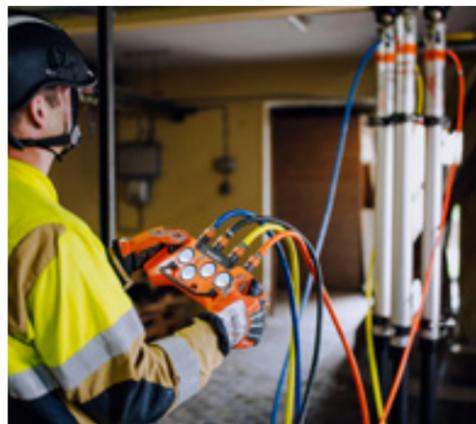

## Advanced Vehicle & Structural Shoring Pneumatic Set AVS-PS1 PNEUMATIC

description	quantity	
Raker Rail RR150	6x	
Strut P60	4x	
Strut P40	4x	
Strut P30	2x	
Strut M10	2x	
Clamp CLA90	10x	
Swivel Base D-ring BPL11A	4x	
Multi Head HPL140	4x	
Swivel Base BPL10	8x	
Pull Restrictor PRS90	4x	
Raker Rail Pin RRP01	4x	
Chain Adapter HPL110	2x	
Chain CWH60	1x	
Shoring Hammer RS15	2x	
Ratchet Belt RBL80	8x	

### Advanced Vehicle & Structural Shoring Pneumatic Set

- For vehicle stabilization, multiple structural shoring solutions and a small trench
- With expansion sets also suitable for larger structural shoring solutions, lifting and high directionals



# OMNISHORE DRIVE ELEMENTS



## Multifunctional equipment

The OmniShore system has been designed to do more with less:  
 - Use your Control Unit, Pressure Reducer and Air Hoses for

pneumatic struts also for all Holmatro Lifting & Stack Bags  
 - Use your Hand Pump for hydraulic struts also for all other single-acting Holmatro tools



### Pneumatic Controller Set: PNCS2

description	quantity	
Control Unit HTC12	1x	
Pressure reducer PRV12U	1x	

### Pneumatic 32ft Hose Set: PHS4

description	quantity	
Air Hose AH 32 DB	1x	
Air Hose AH 32 RD	1x	
Air Hose AH 32 YW	1x	

### T-splitter TS12

art. no.: 151.004.864	
-----------------------	--

### Pneumatic 16ft Hose Set: PHS3

description	quantity	
Air Hose AH 16 DB	1x	
Air Hose AH 16 RD	1x	
Air Hose AH 16 YW	1x	

# OMNISHORE EXPANSION SETS



## Hydraulic Lifting Hand Pump Set

description	quantity	
Hand Pump PA 09 H 2 S 12	2x	
Strut H20	2x	
Swivel Base D-ring BPL11A	2x	
Multi Head HPL140	2x	
Chain Adapter HPL110	2x	
Chain CWH60	1x	
Ratchet Belt RBL80	3x	

## Nailing Pad Set: NPS1

description	quantity	
Nailing Pad CLA90N	8x	

## Strut Bracing Set

description	quantity	
Strut P60	5x	
Clamp CLA90	6x	
Pull Restrictor PRS90 <small>PATENTED</small>	4x	

## Waler Set: WS1 art. no.: 151.004.170

description	quantity	
Waler Rail WR01	6x	

## Monopod Accessory Set: MAS1 art. no.: 151.004.171

description	quantity	
Swivel Base D-ring BPL11A	1x	
Monopod Head POD01	1x	

## Bipod Accessory Set: BAS1 art. no.: 151.004.172


description	quantity	
Bipod Base BPL12	2x	
Bipod Head POD02	1x	

## Tripod Accessory Set: TAS1 art. no.: 151.004.173

description	quantity	
Swivel Base D-ring BPL11A	1x	
Bipod Base BPL12	2x	
Monopod Head POD01	1x	
Bipod Head POD02	1x	

## Hydraulic lifting

All OmniShore sets can be combined with a Hydraulic Lifting Hand Pump Set for structural and vehicle lifting.

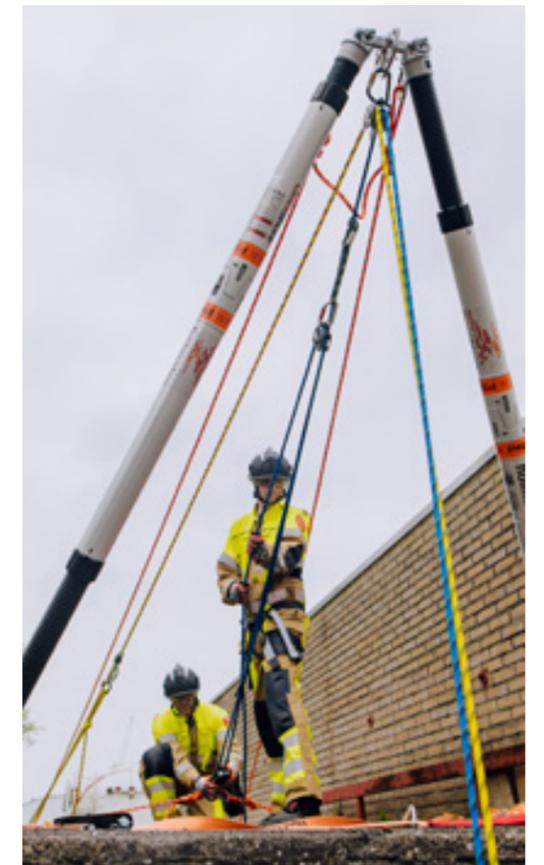

## High directionals

All OmniShore sets can be combined with a Monopod, Bipod or Tripod Set to build high directionals for rope rescue applications.

# OMNISHORE STRUTS



PATENTED



H20, P60, P40, P30, P20 and M10

pneumatic struts - 6 kN / 0,6 t									
model	art. no.	locking system	stroke in	retracted length in	extended length in	weight lb	dimensions in		
P20	151.001.606	locknut	8.5	22	30.5	14.8	22 x 3.9 x 3.9		
P30	151.002.159	locknut	15.6	29.9	45.5	19.4	29.9 x 3.9 x 3.9		
P40	151.002.023	locknut	23.4	41.5	65	26.2	41.5 x 3.9 x 3.9		
P60	151.002.160	locknut	40.6	63.8	104.3	39.7	63.8 x 3.9 x 3.9		
strut with hydraulic cylinder - 100 kN / 10,2 t									
model	art. no.	locking system	total spreading stroke in	mechanical stroke in	hydraulic stroke in	retracted length in	extended length in	weight lb	dimensions in
H20	151.002.166	locknut	21.3	10.6	10.6	24.1	45.4	25.1	24.1 x 3.9 x 6.7
mechanical strut									
model	art. no.	locking system	total spreading stroke in	stroke 1st plunger in	stroke 2nd plunger in	retracted length in	extended length in	weight lb	dimensions in
M10	151.004.920	thread	7	3.3	3.7	11.3	18.3	7.96	11.3 x 3.8 x 3.8

### User friendly design

- Easy to carry – Lightweight
- No risk of the plunger falling out – Every strut has a stop block
- Smooth winding of the nut at all times – A groove on every plunger acts as a drain for dirt
- Easy tightening of the locknut – Each strut has slots for the Shoring Hammer

### Automatic snap-lock mechanism

- Connect and disconnect all accessories within a second
- No protruding parts – Flush to strut body

### Clear information labels

- Overview of all possible strut combinations, corresponding lengths and work load limits
- QR code linking to up-to-date manuals and tabulated data

# OMNISHORE ACCESSORIES



Bases					
<b>Rigid Base BPL30</b> art. no.: 151.002.229		<b>Swivel Base BPL10</b> art. no.: 151.002.194		<b>Ratchet Base R24</b> art. no.: 151.002.332	
<b>Swivel Base D-ring BPL11A</b> art. no.: 151.002.213		<b>Bipod Base BPL12</b> art. no.: 151.002.365			
<b>Inside L-trench Block TRB01</b> art. no.: 151.002.344		<b>Thrust Block TRB02</b> art. no.: 151.002.288			
Heads					
<b>Beam Support HPL120</b> art. no.: 151.002.312		<b>Multi Head HPL140</b> art. no.: 151.004.176		<b>Bipod Head POD02</b> art. no.: 151.002.444	
<b>Flat Saddle HPL130</b> art. no.: 151.002.292		<b>Monopod Head POD01</b> art. no.: 151.002.445		<b>Tripod Head POD03</b> art. no.: 151.002.443	
<b>Chain Adapter HPL110</b> art. no.: 151.004.154					
Rails					
<b>Raker Rail RR150</b> 65.1 x 8.2 x 2.4in art. no.: 151.002.296		<b>Raker Rail Pin RRP01</b> 8.2 x 1.7 x 1.2 in art. no.: 151.002.501			
<b>Waler Rail WR01</b> 83.1 x 9.6 x 3.5 in art. no.: 151.004.140		<b>Waler Rail Pin WRP01</b> 9.8 x 1.7 x 1.2 in art. no.: 151.004.317			
Clamps					
<b>Clamp CLA90</b> art. no.: 151.002.301		<b>Nailing Pad CLA90N</b> art. no.: 151.002.302		<b>Column Clamp CLA90C</b> art. no.: 151.002.494	
				<b>Pull Restrictor PRS90</b> art. no.: 151.004.117	
Assist Tools					
<b>Carrying Strap CST90</b> art. no.: 151.002.330		<b>Load Indicator LSE01</b> art. no.: 151.002.319		<b>Tie Down Keys TDK60</b> art. no.: 151.002.314	
<b>Ratchet Belt RBL80</b> art. no.: 151.002.326		<b>Chain CWH60</b> art. no.: 151.002.313		<b>Earth Nail HEN100</b> 40.4 x 2 x 2 in art. no.: 151.004.139	
<b>Shoring Hammer RS15</b> art. no.: 151.004.109		<b>Nut Winder MNW80</b> 22.8 x 5.6 x 1.9 in art. no.: 151.002.325			

# SHORING & STABILIZATION

V-Strut		
art. no.		150.062.158
max. axial load	lbf.	3,597
closed length	in.	42.5
number of stroke steps		24
stroke step size	in.	1.18
total stroke	in.	28.35
extended length	in.	70.9
weight	lb.	17.4

- Vehicle stabilization strut with integrated head, base plate and tensioning belt with hook and ratchet mechanism.
- All-in-one solution, no loose parts that may get lost.
- Ready for immediate use.
- Unique auto-lock system.
- Fast set-up in just 15 seconds.



V-Strut

Carrying/Storage Bag V-Strut		
art. no.		150.182.284
weight	lb	14.1

- Carrying/storage bag V-Strut, offers room for 2 V-Struts and 1 sheet metal knife.



Sheet Metal Knife	
art. no.	150.062.183

- Sheet metal knife, to create a fixing hole in the car's sheet metal.



Chocks & blocks set A	
art. no. : 158.562.004	

description	quantity
Step chock	2x
Wedge small	2x
Wedge large	2x



Set A

Chocks & blocks set B	
art. no. : 158.562.005	

description	quantity
Lock block low	2x
Lock block medium	2x
Lock block high	2x
Wedge small	2x
Wedge large	2x



Set B

- Made of recycled polyethylene, water- and oil-resistant.
- Virtually indestructible, longer lifespan than wood.
- Non-slip interlocking profile.

# LIFTING BAGS HLB



HLB 16, 21, 31, 38

lifting bags - max. working pressure 12 bar					
model	art. no.	max. effective lifting force (lbf.)	max. inflation height (in.)	dimensions (L x W x H) (in.)	weight (lb.)
HLB 2	350.321.021	4,721	3.7	7.9 x 6.3 x 0.9	1.5
HLB 6	350.321.022	12,364	5.6	11.2 x 9.6 x 0.9	3.3
HLB 8	350.321.023	18,434	7	13.2 x 11.6 x 0.9	4.6
HLB 11	350.321.025	24,729	8.2	15.9 x 12.8 x 1	7.1
HLB 16	350.321.026	34,845	9.3	18.4 x 15.4 x 1	9.9
HLB 21	350.321.027	47,210	10.5	20.4 x 17.3 x 1	12.3
HLB 31	350.321.028	68,792	12.6	23.9 x 20.9 x 1.1	18.3
HLB 38	350.321.030	83,179	13.9	26.1 x 23 x 1.1	22
HLB 53	350.321.031	116,901	16.2	30.2 x 27.2 x 1.1	33.1
HLB 63	350.321.032	139,382	18	32.6 x 29.5 x 1.1	37.5
HLB 85	350.321.034	192,212	21.7	37.3 x 34.3 x 1.1	50.7
HLB 96	350.321.033	211,320	22.2	38.9 x 35.8 x 1.1	55.1



# STACK BAGS HSB



HSB 92, 74, 40, 27

stack bags - max. working pressure 12 bar

model	art. no.	max. effective lifting force (lbf.)	max. inflation height (in.)	dimensions (L x W x H) (in.)	weight (lb.)
HSB27	151.000.948	59,574	6.7	20.5 x 20.5 x 1.1	20.3
HSB40	151.000.949	75,985	6.7	24.4 x 24.4 x 1.1	28.7
HSB74	151.000.950	147,924	6.7	33.1 x 33.1 x 1.1	52.5
HSB92	151.000.951	185,467	6.7	36.2 x 36.2 x 1.1	61.7



# LIFTING BAGS - ACCESSORIES

air hoses					
item	description	length (ft.)	art. no.	HLB	HSB
1	Air Hose AH 16 YW	16	358.570.001	√	√
2	Air Hose AH 16 DB	16	358.570.002	√	√
3	Air Hose AH 16 RD	16	358.570.003	√	√
4	Air Hose AH 32 RD	32	358.570.004	√	√
5	Air Hose AH 32 DB	32	358.570.005	√	√
6	Air Hose AH 32 YW	32	358.570.006	√	√

accessories					
item	description	art. no.	HLB	HSB	
7	Control unit HDC 12	350.182.095	√	√	
8	Control unit HTC12	151.002.137	√	√	
9a	Pressure Reducer PRV 12 LP - CGA-346	358.182.000	√	√	
9b	Pressure Reducer PRV12U	358.182.001			
10	Connection piece	350.582.430	√	√	
11	Shut-off hose SOH 12	358.570.007	√	√	
12	Lifting eyes set (2 pieces) **	350.182.129	√	--	
13	Air adapter set AAS 12	151.000.223	√	√	
14	Slider pads set (3 pieces) *	151.000.180	√	--	
15	T-splitter TS12	151.004.864	√	√	

\* Standard for models HLB 11 and up | \*\* Optional for models HLB 31 and up



# CONCRETE CRUSHER



CC 23

concrete crusher	CC 23	
art. no.		150.012.295
max. opening	in.	9.1
max. crushing force	lbf.	25,403
shape of tip		pointed
weight, ready for use (hose connected)	lb.	45.6
weight (without hose)	lb.	42.1



- Heavy-duty: designed to quickly break away large, thick pieces of concrete.
- Limited dust: supports a clear view at the rescue scene.
- No vibrations: prevents risk of secondary collapse.
- Ideal to use in combination with mini cutter for cutting re-bar.
- More silent than use of rescue saw: only pump produces sound.

- Designed for heavy-duty work
- The crusher hardly generates any dust



A perfect combination: crushing concrete with the CC 23 and cutting re-bar with mini cutter CU 4007 C or SMC 5006

# RESCUE ASSIST TOOLS

ram support		HRS 22	HRS 22 NCT
art. no.		150.181.011	150.003.105
max. load	lbf.	52,830	52,830
weight	lb.	17	32.8

- Suitable for every door sill: HRS 22 NCT for wider door sills and B-pillars of new model cars.
- Various positioning bars for different ramming angles.
- NCT version with teeth providing grip and profiled bars to prevent tilting of the ram.



HRS 22 NCT

HRS 22

cross ram support set		XRS01
art. no.		151.001.164
max. load	lbf	22,054
weight	lb	27.6



XRS 01

tool station		
art. no.		150.182.044
dimensions (L x W)	in	8.2 x 6.6
weight	lb	8.2

- Durable, water- and dirt-repellent PVC coated polyester.
- Foldable, so easy to carry and store.



# RESCUE ASSIST TOOLS

airbag protection cover Secunet III		
art. no.		350.182.089
weight	lb.	1.8

- Easy to install, within seconds.
- For all passenger cars, modern vans, heavy goods vehicles and buses.
- In synthetic storage box with wall-mounting bracket.



sharp edge protection covers		SEP 5	
art. no.		150.581.676	
	dimensions cm	weight kg	quantity
cover with Velcro	26 x 30	0.18	2x
blanket with magnets	60 x 60	0.52	2x
	150 x 60	1.20	1x

- Wear-resistant, fire-retardant polyester, water-repellent.
- Blankets with magnets for instant attachment to a vehicle.
- Washable (magnets are removable).



protection shield		
art. no.		150.182.045
dimensions (L x W)	in.	35.4 x 19.7
weight	lb.	6.4

- Ensures optimal safety for the patient.
- Made of thick yet flexible PVC material.
- Transparent for continuously monitoring of the patient.
- With 4 handles to hold in any position.



# RESCUE ASSIST TOOLS

Glass-Master		
art. no.		150.182.060
weight	lb.	2.2

-Glass Master, to cut through laminated wind shield. Including window punch and mounting clips.



Window Punch		
art. no.		980.005.045
weight	lb.	0,1

-Window punch for quick crushing of side windows of a car in case of an emergency.



extrication gloves			
art. no.	size	art. no.	size
988.005.003	6 / XS	988.005.006	9 / L
988.005.004	7 / S	988.005.007	10 / XL
988.005.005	8 / M	988.005.008	11 / 2XL



# PENTHEON - BATTERIES, CHARGERS AND CABLES



required accessories		art. no.
1	Battery PBPA288 (8.0 Ah)	151.004.490
accessories		art. no.
2	Battery Charger PBCH2 (AC-US)	151.000.742
	Battery Charger PBCH3 (DC)	151.000.632
3	Mains Power Connector PMC2 (US)	151.000.743
4	Tool Diagnostic Cord PTDC1	151.000.508
5	Battery Diagnostic Tool PBDT1	151.000.509
6	On-Tool Charging Cord POTC1	151.000.499
7	Daisy Chain Power Cord DCPC1	151.000.503
8	Battery Pouch BP01	151.002.119
9	Carrying Strap CST01	151.004.757



# BACKPACK PUMP



Backpack Pump GBP10EVO3

specifications	GBP10EVO3	
art. no. (excl. battery)	159.000.168	
engine	electric, battery-driven: 28 VDC - 700 W	
pump type	2-stage axial	
number of tool connections	1	
capacity oil tank	oz.	21.5
capacity oil tank (effective)	oz.	14.4
weight, ready for use <sup>1)</sup>	lb.	16.5
continuous operation	per battery	30 minutes during common vehicle extrications

<sup>1)</sup> including battery, hydraulic oil and coupler



required accessories	for model	art. no.
1 Battery BPA 286 (6.0 Ah)	GBP10EVO3	151.000.307
accessories	art. no.	
Battery charger BCH1 (220 - 240 VAC)	150.182.208	
2 Battery charger BCH2 (100 - 120 VAC)	150.182.209	
Battery car charger BCH3, 12-24 VDC	150.182.286	
3 Battery pouch	150.182.214	



1



2

3

4

### Emission-free

- Ideal for powering rescue equipment in confined spaces like tunnels, trains and collapsed buildings.
- Healthier for rescuers and patients.

### All weather proof

- Suitable for use at below zero temperatures, down to -4 °F.
- Suitable for use in wet weather conditions.

# SPIDER RANGE PUMPS - SR 10



SR 10 PC 1 E

specifications	SR 10 PC 1	
art. no.	158.152.175	
EN 13204 <sup>1)</sup>	STO	
NFPA 1960 compliant	√	
engine	petrol: 2.1 HP - 1.6 kW	
pump type	3-stage axial	
number of tool connections	1	
capacity oil tank	oz.	96
weight, ready for use <sup>2)</sup>	lb.	32

<sup>1)</sup> EN 13204: STO = Single Tool Operation | <sup>2)</sup> including hydraulic and engine oil, fuel and coupler

### Large hydraulic oil capacity

- Pump can be used with any tool including the biggest rams

### 3-stage pump technology

- Much higher flow/speed in 2nd stage for quicker rescue operations.
- Lower flow/speed in 3rd stage for more tool control.

### Hydraulic oil level indicator

- For quick and easy monitoring of oil level from the outside of the pump.
- Also on SR 20 (see page 58).



### Compact and lightweight

- Ergonomic design.
- Easy to carry.
- Easy to store.



### Soft-grip carrying handle

- Better grip.
- Ergonomic design for improved carrying balance: pump easier to carry.

## SPIDER RANGE PUMPS - SR 20



SR 20 PC 2 X CARB

specifications	SR 20 PC 2 X CARB	SR 20 HC 2 R
art. no.	158.152.253	158.152.223
EN 13204 <sup>1)</sup>	MTO	MTO
NFPA 1960 compliant	√	√
engine	4-stroke - 3.0 HP - 2.2 kW	230 VAC - 60 Hz - 1 Ph
pump type	2 x 3-stage axial pump	3-stage axial pump
number of tool connections	2	2
capacity oil tank	oz. 146.8	146.8
weight, ready for use <sup>2)</sup>	lb. 48.7 <sup>2)</sup>	72.3 <sup>3)</sup>

<sup>1)</sup> EN 13204: STO = Single Tool Operation, MTO = Multiple Tool Operation | <sup>2)</sup> including hydraulic and engine oil, fuel and couplers | <sup>3)</sup> including hydraulic oil and coupler(s)

### 3-stage pump technology

- Much higher flow/speed in 2nd stage for quicker rescue operations.
- Lower flow/speed in 3rd stage for more tool control.

### Large hydraulic oil capacity

- Pump can be used with any tool including the biggest rams (STO model).
- Enough oil to operate any two rescue tools at the same time (MTO models).

### Compact and lightweight

- Ergonomic design.
- Easy to carry.
- Easy to store.

## SPIDER RANGE PUMPS - SR 40



SR 40 PC 2

specifications	SR 40 PC 2
art. no.	158.152.183
EN 13204 <sup>1)</sup>	MTO
NFPA 1960 compliant	√
engine	gas: 5.5 HP - 4.1 kW
pump type	3-stage axial pump
number of tool connections	2
capacity oil tank	oz. 214.4
weight, ready for use <sup>2)</sup>	lb. 81.6 <sup>2)</sup>

<sup>1)</sup> MTO = Multiple Tool Operation | <sup>2)</sup> including hydraulic and engine oil, fuel and couplers | <sup>3)</sup> including hydraulic oil and couplers

### 3-stage pump technology

- Much higher flow/speed in 2nd stage for quicker rescue operations.
- Lower flow/speed in 3rd stage for more tool control.

### Hydraulic Oil Level Indicator



# HANDPUMP



PA 09 H 2 S

specifications	single hose <sup>1)</sup>
	<b>PA 09 H 2 S</b>
art. no.	150.142.068
number of tool connections <sup>2)</sup>	1
number of stages	2
operation	hand
capacity oil tank	oz. 30.4
weight, ready for use <sup>3)</sup>	lb. 10.6

<sup>1)</sup> for use with single acting tools only | <sup>2)</sup> EN 13204: STO = Single Tool Operation | <sup>3)</sup> including hydraulic oil and coupler



# HOSES

CORE hoses	art. no.	color	length (ft.)	weight (lb.) <sup>1)</sup>
Hose CORE 4' black	158.572.159	black	4	2.5
Hose CORE 6' black	158.572.160	black	6	3
Hose CORE 6' orange	158.572.145	orange	6	3
Hose CORE 10' black	158.572.162	black	10	4.5
Hose CORE 16' black	158.572.131	black	16	6
Hose CORE 16' orange	158.572.124	orange	16	6
Hose CORE 32' black	158.572.130	black	32	11
Hose CORE 32' orange	158.572.125	orange	32	11
Hose CORE 50' black	158.572.164	black	50	16.5
Hose CORE 50' orange	158.572.126	orange	50	16.5

<sup>1)</sup> weight with couplers and filled with oil



CORE hose 16 ft.

hose reels CORE (single)	art. no.	color	length (ft.)	dimensions (in.)	weight (lb.) <sup>1)</sup>
HR 5420 O	158.072.116	orange	65	20.7 x 9.9 x 20.5	42.8

<sup>1)</sup> weight inclusive hose with couplers and filled with oil



HR 5420 O

### Foldable handle for hose rolling

- To save valuable storage space in your truck.
- Quick & easy to use: handle folds out and locks in one step.



With two high-tech production plants in the Netherlands and the USA, the strictest quality, safety and performance standards in the market and a history of groundbreaking product innovations, Holmatro is the world's leading rescue tool supplier. We are very proud to see that Holmatro tools are the first choice of many fire & rescue professionals around the globe.

**PERSONAL POWER PUMP**

The first lightweight, mobile rescue pump enabling one man to carry a full set of tool, pump and hoses on his own.



**INCLINED CUTTING**



**INCLINED CUTTER**

First cutter with a 30-degree angled jaw, improving user comfort and maximizing working space.

**T1**

All-in-one forcible entry tool for rescue applications

**HOLMATRO T1**



**OMNISHORE**

A revolutionary shoring system reimaged from the ground up, designed in accordance with the highest standards of quality and safety.



**OmniShore**  
Safety secured.

# A HISTORY OF INNOVATION

1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023



**720 BAR WORKING PRESSURE**

First hydraulic rescue tools operating at a pressure higher than 500 bar. The birth of lighter and more compact rescue equipment.



**DOUBLE PLUNGER RAM**

First ram with twin plungers. Designed to double the spreading distance without the risk of a plunger bending.



**NCT CUTTERS**

First cutter with U-shaped NCT (New Car Technology) blades, specially designed to cut new car construction.



**BATTERY TOOLS**

First high-performance battery-powered rescue tools. Easy to carry and handle thanks to a low weight (< 15 kg incl. battery).



**CORE TECHNOLOGY**

The world's first single hose / single coupler system. A turning point in rescue tool technology, making rescue procedures safer, quicker and easier.

**PENTHEON SERIES**

Unparalleled speed, ultimate control and the unrestrained performance to keep working in all circumstances. Miles ahead of all other rescue tools in the market.



**MINI CUTTER**

The first Cordless Mini Cutter to complete any rescue set.



# YOU CAN COUNT ON US, FOR LIFE

---

holmatro.com

 Holmatro Rescue World

 @HolmatroRescue

 holmatrorescue

 HolmatroRescue

 Holmatro Rescue Equipment

 @holmatrorescue

## **Holmatro USA**

Glen Burnie MD,  
USA

**T** 410-768-9662

**Disclaimer** - While the greatest care has been devoted to the content, it is possible that the information in this document is incorrect or incomplete. Holmatro B.V. and its affiliated companies (here-after: Holmatro) cannot be held liable in any way for the consequences of activities undertaken based on this document. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (phone number: +31 (0)162-589200). Nothing from this document can be copied and/or made public in any way without the explicit authorization of Holmatro.