

## Technical specification sheet

# HAHC150H5 | Aluminum Hollow Plunger Cylinder

Specifications		
article number		100.112.386
short description		Aluminum Hollow Plunger Cylinder
model		HAHC150H5
max. working pressure	bar/Mpa	720 / 72
tonnage	t	150
stroke	mm	50
closed height	mm	247
capacity	kN/t	1531 / 156.1
capacity (retract)	kN/t	852 / 86.9
effective pressure area (press)	cm <sup>2</sup>	212.7
effective pressure area (retract)	cm <sup>2</sup>	118.4
required oil content (effective)	cc	471
required oil content (press)	cc	1063
required oil content (retract)	cc	592
connection		A 118
cylinder type		hollow plunger
acting type		double
return type		hydraulic
material		aluminium
weight, ready for use	kg	41.0
ASME		B30.1

### Technical drawing dimensions


dimension A	mm	247
dimension B	mm	285
dimension C	mm	145
dimension D	mm	80
dimension E	mm	49
dimension F	mm	230
dimension G	mm	88.5
dimension P	mm	72
dimension R	mm	80

### Standard supplied with

- High flow female coupler A118
- Hollow saddle; prevents damage to the plunger
- Larger cylinders are equipped with foldable handles for easy carrying and positioning

### Accessories

Saddle TRS150	101.000.909
---------------	-------------

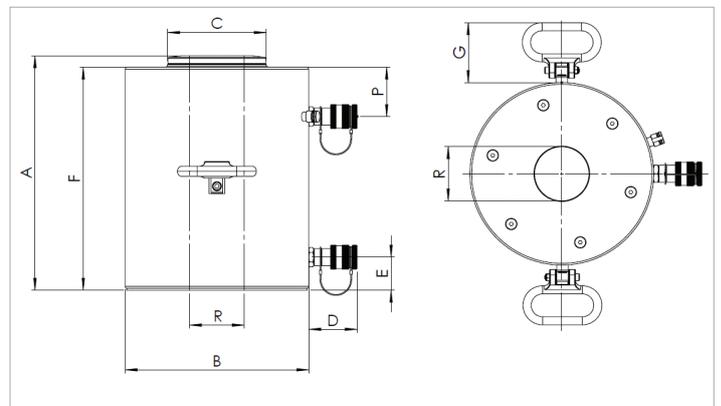

holmatro.com

© Holmatro 2025-09-29

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.