


HBC400A30 | Battery Cutter

Specifications		
article number		101.003.239
model		HBC400A30
max. working pressure	psi	7252
blade type		30 standard
cutter type		Battery
short description		Battery Cutter
battery included		Yes, 2 pcs
connectivity, mobile app		Bluetooth
max. cutting force	lbf	219638
max. cutting opening	in	7.2
protection rate		IP57
sound emission @ 1m/3.25ft	dB(A)	75
sound emission @ 4m/13ft	dB(A)	66
required oil content (effective)	oz	9.8
hydraulic oil type		ISO-L HV VG 36
weight, ready for use	lb	47.4
dimensions (LxWxH)	in	35 x 10.7 x 10.9
temperature range	°F	-4 +131
max. cutting diameter round bar (S235 acc. to EN 10025-2)	in	1.2
max. cutting diameter round tube (E235 acc. to EN 10305-1) based on wall thickness 3mm/0,12in.	in	3.9
max. cutting diameter round tube (E235 acc. to EN 10305-1), based on wall thickness 5mm/0,2in	in	2.4
catalytic converter	%	100
number of cuts per day		50
number of operating hours per day		4

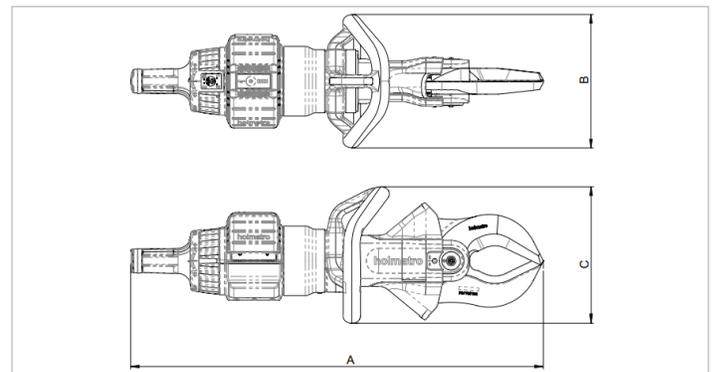

Technical drawing dimensions		
dimension A	in	35
dimension B	in	10.7
dimension C	in	10.9

Required Accessories	
Battery Charger PBCH1 (AC-EU)	101.003.242
Battery Charger PBCH5 (AC-UK)	101.003.243
Battery Charger PBCH2 (AC-US)	101.003.244

Accessories	
Set blades HMC/HBC400A10	101.003.254
Carrying strap HBC cutters	101.003.351