

Technical specification sheet

HRH 5 S 17.5 | Railhook

Specifications


article number		101.002.744
short description		Railhook
model		HRH 5 S 17.5
max. working pressure	bar/MPa	720 / 72
tonnage	t	5
stroke	mm	175
capacity	kN/t	50 / 5.1
effective pressure area	cm ²	7.1
required oil content (effective)	cc	159
weight, ready for use	kg	20.0

Technical drawing dimensions

dimension A	mm	420
dimension B	mm	832
dimension C	mm	186
dimension D	mm	748
dimension E	mm	175
dimension F	mm	101
dimension H	mm	125

Standard supplied with

- Multi-Purpose cylinder HGC 5 S 17.5.

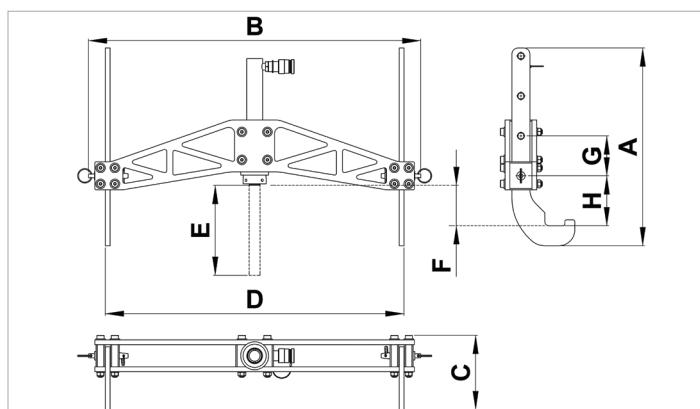

holmatro.com

© Holmatro 2026-08-13

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.