

Technical specification sheet


06 T 25 E | Vari Pump

Specifications		
article number		101.002.783
model		06 T 25 E
max. working pressure	bar/MPa	550 / 55
short description		Vari Pump
capacity oil tank (effective)	cc	25000
number of outputs		2
number of stages		1
first stage output / min.	cc	600
first stage pressure range	bar/MPa	0 - 550 / 0 - 55
operator type		electric motor
engine		400 VAC - 1.5 kW - 50 Hz - 3 Ph
speed	rpm	2835
weight, ready for use	kg	88.0
dimensions (LxWxH)	mm	666 x 440 x 706

Technical drawing dimensions		
dimension A	mm	666
dimension B	mm	440
dimension C	mm	706

Standard supplied with	
Quick couplers & dust caps.	

Accessories	
Pressure Relief Tool A239	150.182.016

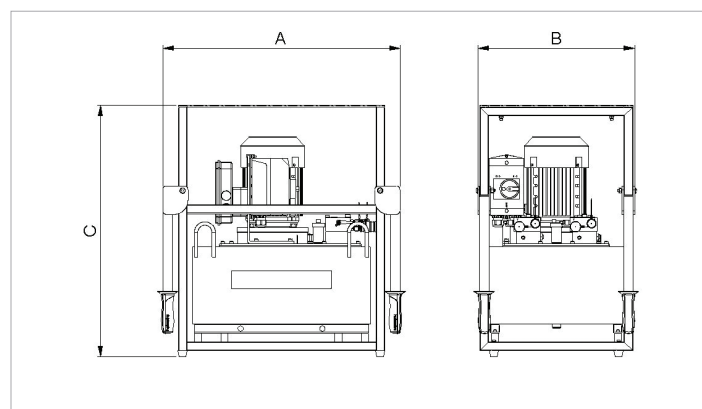

holmatro.com

© Holmatro 2026-08-24

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.