


## Technical specification sheet

# 04 Q 50 D + 6EVWLRC | Quattro Pump

Specifications			
article number			170.152.060
model			04 Q 50 D + 6EVWLRC
max. working pressure	bar/Mpa		550 / 55
short description			Quattro Pump
capacity oil tank (effective)	cc		50000
number of outputs			6
number of stages			2
first stage output / min.	cc		1100
second stage output / min.	cc		400
first stage pressure range	bar/Mpa		0 - 170 / 0 - 17
second stage pressure range	bar/Mpa		170 - 550 / 17 - 55
operator type			electric motor
engine			230 VAC - 2.2 kW - 50 Hz - 1 Ph
speed	rpm		2850
weight, ready for use	kg		230.0

Technical drawing dimensions			
dimension A	mm		700
dimension B	mm		570
dimension C	mm		1070

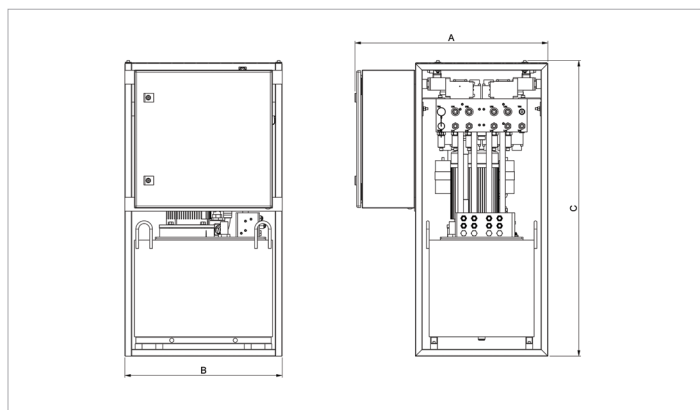

[holmatro.com](https://www.holmatro.com)

© Holmatro 2023-12-20

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.