Technical specification sheet



06 Q 25 J + RC | Quattro Pump


| Specifications | | |
|-------------------------------|-----|------------------|
| article number | | 101.002.804 |
| model | | 06 Q 25 J + RC |
| max. working pressure | psi | 7977 |
| short description | | Quattro Pump |
| capacity oil tank (effective) | OZ | 845.4 |
| number of outputs | | 4 |
| number of stages | | 2 |
| first stage output / min. | OZ | 54.1 |
| second stage output / min. | OZ | 20.3 |
| first stage pressure range | psi | 0 - 1450 |
| second stage pressure range | psi | 1450 - 7977 |
| operator type | | electric motor |
| speed | rpm | 3600 |
| weight, ready for use | lb | 308.6 |
| dimensions (LxWxH) | in | 33.7 x 28.9 x 47 |

| Technical drawing dimensions | | |
|------------------------------|----|------|
| dimension A | in | 33.7 |
| dimension B | in | 28.9 |
| dimension C | in | 47 |


Standard supplied with

- Remote control / AA batteries for back-up
- With a chargeable battery
- Quick couplers & dust caps: outlets for traversing.
 Flat face couplers: dust cap function incorporated: outlets for lifting.



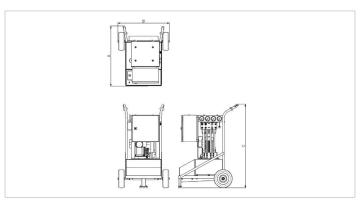

Layout remote control





holmatro.com