## **Technical specification sheet**




## 12 S 6 SD | Vari Pump

| Specifications                |         |                                    |
|-------------------------------|---------|------------------------------------|
| article number                |         | 100.152.020                        |
| model                         |         | 12 S 6 SD                          |
| max. working pressure         | bar/Mpa | 720 / 72                           |
| short description             |         | Vari Pump                          |
| capacity oil tank (effective) | CC      | 6000                               |
| number of outputs             |         | 1                                  |
| number of stages              |         | 1                                  |
| first stage output / min.     | CC      | 1200                               |
| first stage pressure range    | bar/Mpa | 0 - 720 / 0 - 72                   |
| operator type                 |         | electric motor                     |
| engine                        |         | 230 VAC - 1.5 kW - 50<br>Hz - 1 Ph |
| speed                         | rpm     | 2850                               |
| weight, ready for use         | kg      | 38.0                               |
| dimensions (LxWxH)            | mm      | 400 x 300 x 441                    |

| Required Accessories                  |             |  |
|---------------------------------------|-------------|--|
| Control Valve - Single Acting - M 311 | 100.181.311 |  |
| Control Valve - Double Acting - M 322 | 100.181.322 |  |

| Accessories   |             |
|---|-------------|
| Single-/Double Acting Valve (SADA) M 304                  | 100.172.051 |
| Control Valve - Double Acting - M 323 (Deadmans Function) | 100.181.323 |
| Remote Control Valve + Oil Filter - Double Acting - M 326 | 100.182.321 |
| Pressure Control Valve M 303                              | 100.181.303 |



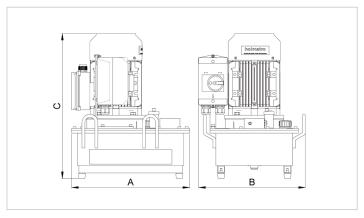



## holmatro.com

© Holmatro 2024-04-16