Technical specification sheet



12 W 25 G | Vari Pump


Specifications		
article number		101.003.028
model		12 W 25 G
max. working pressure	bar/Mpa	720 / 72
short description		Vari Pump
capacity oil tank (effective)	CC	25000
number of outputs		1
number of stages		2
first stage output / min.	CC	3100
second stage output / min.	CC	1100
first stage pressure range	bar/Mpa	0 - 200 / 0 - 20
second stage pressure range	bar/Mpa	200 - 720 / 20 - 72
operator type		electric motor
engine		110-120 VAC - 1.5 kW - 60 Hz - 1 Ph
speed	rpm	3600
weight, ready for use	kg	67.0
dimensions (AxBxC)	mm	500 x 400 x 593

Technical drawing dimensions		
dimension A	mm	500
dimension B	mm	400
dimension C	mm	593

Required Accessories	
Control Valve - Single Acting - M 311	100.181.311
Control Valve - Double Acting - M 322	100.181.322

Accessories		
Single-/Double Acting Valve (SADA) M 304	100.172.051	
Control Valve - Double Acting - M 323 (Deadmans Function)	100.181.323	
Remote Control Valve + Oil Filter - Double Acting - M 326	100.182.321	
Pressure Control Valve M 303	100.181.303	



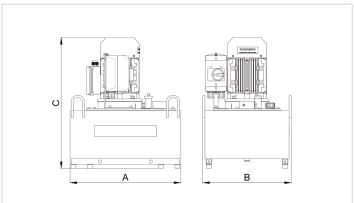



holmatro.com

© Holmatro 2024-04-16