Technical specification sheet



BCU 10 A 10 | Battery Cutter

| Specifications | | |
|----------------------------------|-------|----------------|
| article number | | 170.012.130 |
| model | | BCU 10 A 10 |
| max. working pressure | psi | 7252 |
| blade type | | 10 cable |
| cutter type | | mobile |
| short description | | Battery Cutter |
| battery included | | no |
| max. cutting force | lbf | 54404 |
| max. cutting opening | in | 4.5 |
| protection rate | | IP54 |
| sound emission @ 1m/3.25ft | dB(A) | 74 |
| sound emission @ 4m/13ft | dB(A) | 65 |
| required oil content (effective) | oz | 2.8 |
| weight, ready for use | lb | 47.4 |
| temperature range | °F | -4 + 131 |


| Technical drawing dimensions | | |
|------------------------------|----|------|
| dimension A | in | 34.4 |
| dimension B | in | 10.9 |
| dimension C | in | 7.6 |

| Required Accessories | | |
|--------------------------------|-------------|--|
| Greenline Battery BPA285 | 150.006.208 | |
| Greenline Battery Charger BCH1 | 150.182.208 | |
| Greenline Battery Charger BCH2 | 150.182.209 | |
| Greenline Battery Charger BCH3 | 150.182.286 | |
| Greenline Battery BPA286 | 151.000.307 | |

| Accessories | | |
|----------------------------|-------------|--|
| Mains Power Connector BMC1 | 150.182.206 | |
| Mains Power Connector BMC2 | 150.182.207 | |
| Carrying Strap | 150.182.249 | |
| Battery Pouch | 150.182.214 | |
| Ring spanner hex. size 41 | 170.183.001 | |
| Torque Wrench | 150.581.671 | |
| Lubricants Set | 170.013.021 | |





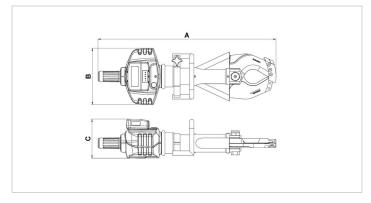

holmatro.com