

Technical specification sheet


CCU10 | Mini Cutter

Specifications			
article number			151.001.500
model			CCU10
short description			Mini Cutter
max. working pressure	psi		10443
battery included			yes
max. cutting opening	in		2.3
theoretical cutting force	lbf		49458
protection rate			IP54
sound emission @ 1m/3.25ft	dB(A)		74
sound emission @ 4m/13ft	dB(A)		65
hydraulic oil type			ISO-L HV VG 36
cutter jaw			inclined
weight, ready for use	lb		10.8
temperature range	°F		-4 + 131
weight excl. battery	lb		9.9
dimensions (AxBxC)	in		21.8 x 6.1 x 3.6
EN 13204 compliant			yes
EN 13204 classification			AC59B-4.9
EN 13204, cutting capacity			1D 2D 3C
NFPA 1936 compliant			yes
NFPA 1936, cutting capacity			A4 B3 C2 D4 E4

Safety factors / tests	
hydraulic safety factor	2:1
endurance test tool	1000 cycles of biting in material that cannot be cut
endurance test dead man's button	6000 cycles

Standard supplied with	
<ul style="list-style-type: none"> • i-Bolt Technology • Integrated LED lighting • Two 18V 2Ah batteries CBPA182 	

Required Accessories	
Battery charger CBCH1 (AC-EU)	151.002.112
Battery charger CBCH5 (AC-UK)	151.002.113
Battery charger CBCH7 (AC-AU/NZ)	151.002.114
Battery charger CBCH2 (AC-US)	159.000.212

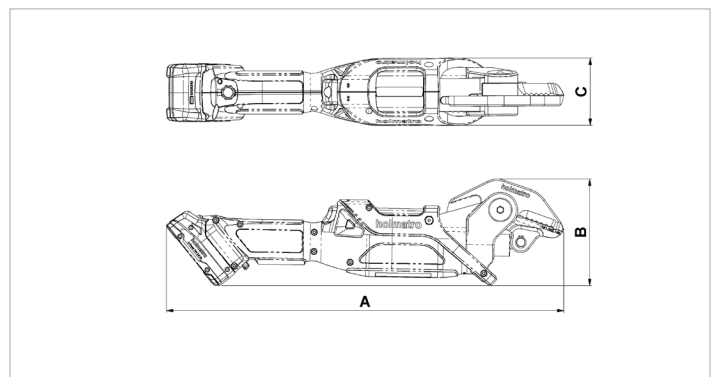

holmatro.com

© Holmatro 2023-03-24

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.