

HAHC30S15 | Aluminum Hollow Plunger Cylinder

Specifications		
article number		100.112.373
short description		Aluminum Hollow Plunger Cylinder
model		HAHC30S15
max. working pressure	psi	10443
tonnage	lb	66139.0
stroke	in	5.9
closed height	in	12.8
capacity	lbf	77109
effective pressure area	sq. in.	7.4
required oil content (effective)	OZ	24.2
connection		A 118
cylinder type		hollow plunger
acting type		single
return type		spring
material		aluminium
weight, ready for use	lb	20.9
ASME		B30.1


Technical drawing dimensions		
dimension A	in	12.8
dimension B	in	5
dimension C	in	3.3
dimension D	in	3.1
dimension E	in	1.3
dimension F	in	10.3
dimension G	in	1.7
dimension H	in	5.9
dimension R	in	1.3
angle A1	0	45

Standard supplied with

- High flow female coupler A118
- Hollow saddle; prevents damage to the plunger
- Larger cylinders are equipped with foldable handles for easy carrying and positioning

Accessories	
Saddle TRS30	100.003.654



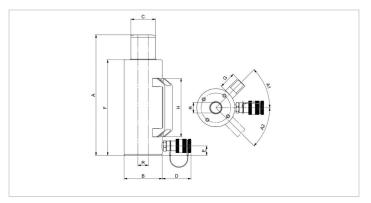



holmatro.com