Technical specification sheet



HGC 5 \$ 5 | Multi Purpose Cylinder

Specifications		
article number		100.112.212
short description		Multi Purpose Cylinder
model		HGC 5 S 5
max. working pressure	psi	10443
tonnage	lb	11023.0
stroke	in	2
closed height	in	5.1
capacity	lbf	11465
effective pressure area	sq. in.	1.1
required oil content (effective)	OZ	1.2
connection		A 118
cylinder type		multi purpose
acting type		single
return type		spring
material		steel
weight, ready for use	lb	2.9
ASME		B30.1


Technical drawing dimensions		
dimension A	in	5.1
dimension B	in	1.6
dimension C1	in	1.1
dimension C2	in	0.6
dimension D	in	3.1
dimension E	in	0.8
dimension F	in	5
dimension G	in	0.2
dimension J	threadsize	1½"-16-UN
dimension K	in	1.2
dimension L	threadsize	3/4"-16-UNF
dimension M	in	0.8
dimension N	in	1
dimension O	threadsize	M6x9 (2x)
angle A1	0	90

Standard supplied with

- Collar thread and base mounting holes
- Internal plunger thread on all models to 50 tons
- High flow female coupler A118
- Flat saddle

Accessories	
Aluminium Base Plate HGC 5 / 10	100.003.004
Assembly / Welding Ring HGC 5	100.182.189



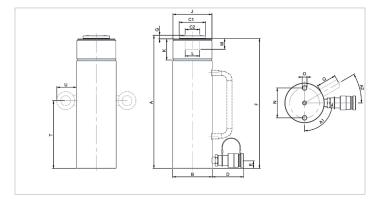

holmatro.com