## **Technical specification sheet**




## HHJ 20 \$ 15 | Hollow Plunger Cylinder

Specifications		
article number		100.112.030
short description		Hollow Plunger Cylinder
model		HHJ 20 S 15
max. working pressure	bar/Mpa	720 / 72
tonnage	t	20
stroke	mm	150
closed height	mm	389
capacity	kN/t	223.9 / 22.8
effective pressure area	cm <sup>2</sup>	31.1
required oil content (effective)	CC	467
connection		A 118
cylinder type		hollow plunger
acting type		single
return type		spring
material		steel
weight, ready for use	kg	18.0

Technical drawing dimensions		
dimension A	mm	389
dimension B	mm	100
dimension C	mm	50
dimension D	mm	90
dimension E	mm	31
dimension F	mm	377
dimension R	mm	27
dimension S	threadsize	M38x1,5
I type		[12]



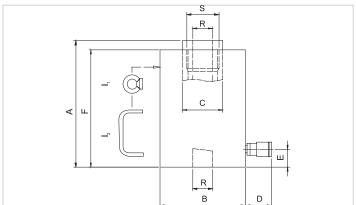

## Standard supplied with

- High flow female coupler A118
- Hollow saddle (with the exception of the HHJ5S2.5, HHJ12S5 and HHJ12S15)

Accessories	
Flat Saddle S 20 B	100.181.012
Thread Saddle S 20 C	100.181.013



## holmatro.com

© Holmatro 2023-12-07