
## **Technical specification sheet**



# HJ 300 G 15 Cylinder

Specifications			
article number		100.112.050	
short description		Cylinder	
model		HJ 300 G 15	
max. working pressure	bar/Mpa	720 / 72	
tonnage	t	300	
stroke	mm	150	
closed height	mm	382	
capacity	kN/t	2933 / 299.1	
effective pressure area	Cm <sup>2</sup>	415	
required oil content (effective)	CC	6225	
required oil content (press)	CC	6225	
connection		A 118	
cylinder type		high tonnage	
acting type		single	
return type		gravity	
material		steel	
weight, ready for use	kg	238.0	



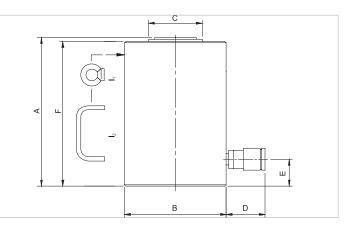

Technical drawing dimensions		
dimension A	mm	382
dimension B	mm	316
dimension C	mm	190
dimension D	mm	70
dimension E	mm	70
dimension F	mm	370
l type		[11]

### Standard supplied with

- High flow female coupler A118
- Flat saddle

#### Accessories

Tilting Saddle S 500 TN	100.999.232



#### holmatro.com

#### © Holmatro 2024-01-25

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.