## Technical specification sheet

# HPJ 60 S 15 | Pulling Cylinder

| Specifications | | |
|---|---|---|
| article number | | 100.131.021 |
| short description | | Pulling Cylinder |
| model | | HPJ 60 S 15 |
| max. working pressure | bar/Mpa | 720 / 72 |
| tonnage | t | 60 |
| stroke | mm | 150 |
| capacity | kN/t | 610.4 / 62.2 |
| effective pressure area | $cm^2$ | 84.8 |
| required oil content (effective) | cc | 1272 |
| connection | | A 118 |
| cylinder type | | pulling |
| acting type | | single |
| return type | | spring |
| material | | steel |
| weight, ready for use | kg | 45.0 |

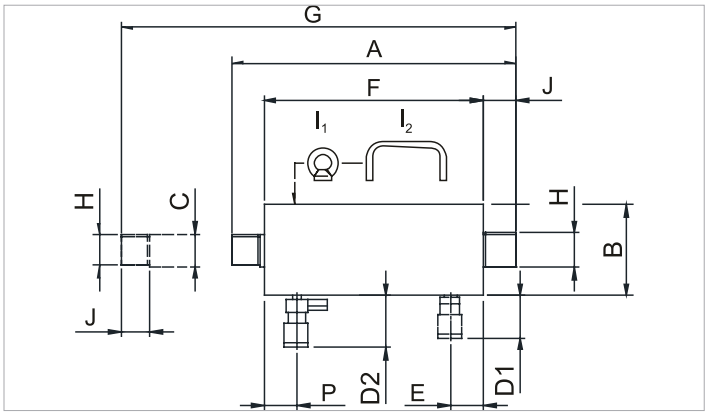


| Technical drawing dimensions | | |
|---|---|---|
| dimension A | mm | 530 |
| dimension B | mm | 157 |
| dimension C | mm | 60 |
| dimension D2 | mm | 85 |
| dimension F | mm | 400 |
| dimension G | mm | 680 |
| dimension H | threadsize | M54x1.5 |
| dimension J | mm | 60 |
| dimension P | mm | 52 |

**Standard supplied with**

- High Flow female coupler with pressure relief valve A 418

| Required articles | |
|---|---|
| Protection Spring HPJ 60 S 15 | 100.581.161 |
| Pulling Eye HPJ 60 S 15 | 100.181.052 |

**holmatro.com**

© Holmatro 2020-06-02
While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.