
Technical specification sheet



HPJ 60 S 15 | Pulling Cylinder

Specifications			
article number		100.131.021	
short description		Pulling Cylinder	
model		HPJ 60 S 15	
max. working pressure	bar/Mpa	720 / 72	
tonnage	t	60	
stroke	mm	150	
capacity	kN/t	610.4 / 62.2	
effective pressure area	Cm ²	84.8	
required oil content (effective)	CC	1272	
connection		A 118	
cylinder type		pulling	
acting type		single	
return type		spring	
material		steel	
weight, ready for use	kg	45.0	



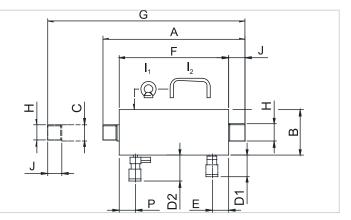

Technical drawing dimensions		
dimension A	mm	530
dimension B	mm	157
dimension C	mm	60
dimension D2	mm	85
dimension F	mm	400
dimension G	mm	680
dimension H	threadsize	M54x1.5
dimension J	mm	60
dimension P	mm	52

Standard supplied with

• High flow female coupler A118, with pressure relief valve A418

Required Accessories	
Protection Spring HPJ 60 S 15	100.581.161
Pulling Eye HPJ 60 S 15 - 2 Required	100.181.052



holmatro.com

© Holmatro 2023-12-23

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.