


	1	Monopod Head
	1/2*	Pull Restrictor
	1/2**	OmniShore Strut
	1	Swivel Base D-ring

*optional

** depends on configuration

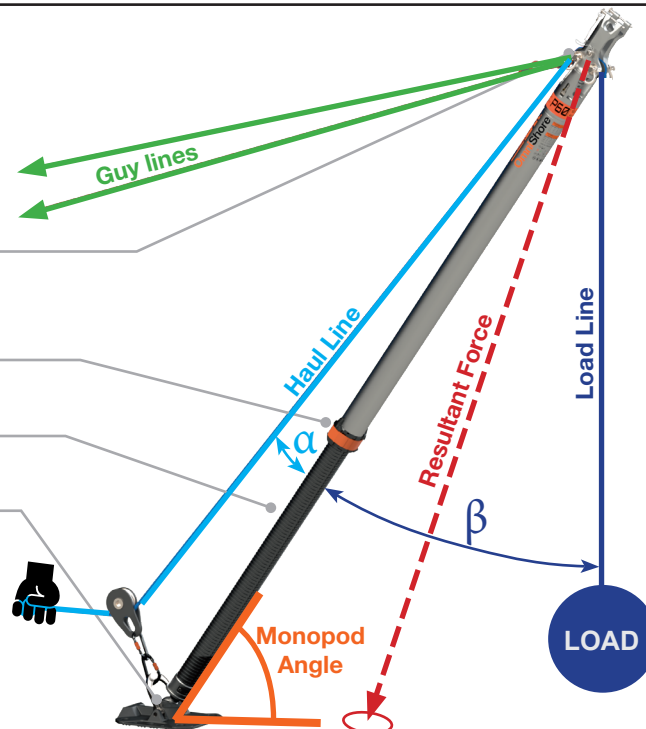

		Max. Load monopod (safety factor 4)										
Monopod Angle	Strut Length	ft	≤ 8	9	10	11	12	13	14	15	16	17
45° - 60°	Max. Load	lb	2800	2500	2000	1700	1300	1100	1000	900	800	700

- Ensure the haul angle (α) is smaller than the load angle (β) and greater than 0° , so that the resultant force remains positioned in front of the monopod.
- Maintain a monopod angle between 45° and 60° at all times.
- Keep the load line as vertical as possible; maximum allowable deviation: $\pm 10^\circ$.
- The load table is valid only for the configuration shown above and provided that all instructions are followed.
- The user is responsible for selecting suitable lines, pulleys, carabiners, and other rigging components.
- The shoring construction and installation must be approved by a trained Rope Rescue Specialist.
- The guy lines and base plate must be securely anchored to the ground.

Guy Lines

- When positioning the guy lines use the following rules:

A = Strut Length

$B \geq 2A$

$B \leq C \leq 2B$

For example:

A = 9 feet

B = 18 feet

C = between 9 and 18 feet

- Make sure to anchor the guy lines at the same or a higher level than the base plates.
- If all instructions are followed, the calculated load in any guy line will not exceed **2600 lbf**.

